


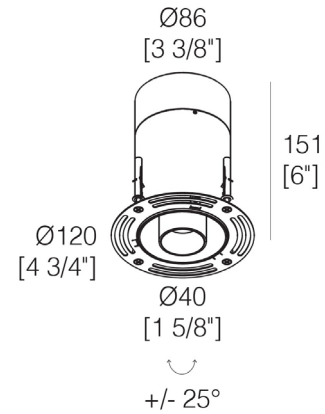

LIGHT SOURCE & OPTIC

Power

9W

Lens

14° - not interchangeable
18°/ 24°/ 33°/ 52° - interchangeable

Beam Direction

Adjustable, Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Lifetime

(L70) >77.000 hrs

FIXTURE

Dimensions

Ø 4 3/4" x H 6"

Material

Aluminium

Body finishes

Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)

Decorative ring finishes

Gold Chrome
Shiny Chrome
Satin Gold
Satin Nickel
Black

Weight

730gr (1,60 lbs)

Mounting

Recessed: cut out Ø 86mm (3 3/8')

Fixing

Fixing frame for flush mounting

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
500 mA
Typical Vf= 18V

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
DALI

PHOTOMETRIC DATA (3000K CRI>90)

9W - 18° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.32	3087
2	0.64	772
3	0.96	343
4	1.28	193
5	1.60	123

Total lumen output
712 lm

Efficacy
79 lm/W

9W - 24° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.41	1919
2	0.83	480
3	1.24	213
4	1.66	120
5	2.07	77

Total lumen output
685 lm

Efficacy
76 lm/W

9W - 33° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.60	980
2	1.21	245
3	1.81	109
4	2.41	61
5	3.02	39

Total lumen output
618 lm

Efficacy
69 lm/W

9W - 52° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.97	550
2	1.94	138
3	2.91	61
4	3.88	34
5	4.85	22

Total lumen output
682 lm

Efficacy
76 lm/W

9W - 14° | UGR 10



H (m)	D (m)	Eav (lx)
1	0.25	4298
2	0.50	1074
3	0.76	478
4	1.01	269
5	1.26	172

Total lumen output
659 lm

Efficacy
73 lm/W

INTERCHANGEABLE ACCESSORIES

Optical Filters

- Hex louver
- Elliptical Filter
- Prismatic filter
- Softening lens

Lenses

18° / 24° / 33° / 52°

Filter holder rings


- Black
- Gold Chrome
- Satin Gold
- Satin Nickel
- Shiny Chrome

INSTALLATION ACCESSORIES


Fixing rame (A01540.40)
Necessary element: please specify always 1
frame for each Fixture in the purchase order

SUGGESTED REMOTE DRIVERS

0/1..10V:
CC36-R-500-NF



DALI 2, PUSH:
CC30-D-500-NL



Other options upon request