




Ariel PL

[1] 14° Lens not interchangeable

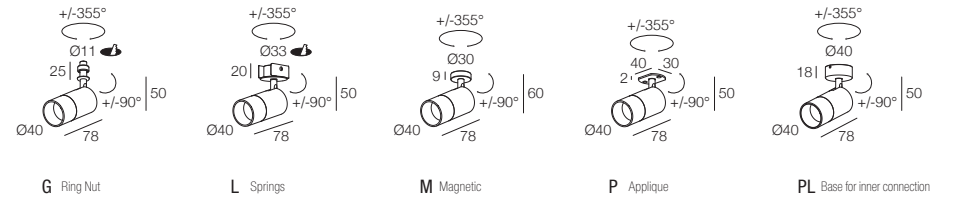

	500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4597	7Q4597	7Q4598
18° Lens	784597	784597	784598
24° Lens	7G4597	7G4597	7G4598
33° Lens	7E4597	7E4597	7E4598
52° Lens	754597	754597	754598

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	G Ring Nut
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	L Springs
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Magnetic
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	P Applique
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	PL Base for inner connection
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			



SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	p. 700
700mA	CC20-F-700-N	p. 702

INTERCHANGEABLE ACCESSORIES



p. 676

EXAMPLE CODE COMPOSITION

