


Armonia Bridge linear lens

Showcase Lighting | IP40 | Class III | Dimmable

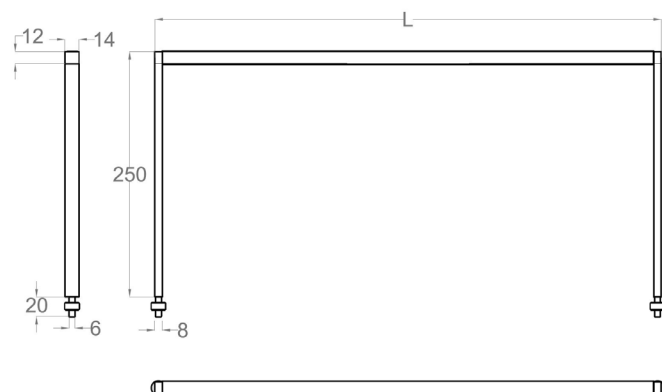

LIGHT SOURCE & OPTIC

Power

12W/m
25W/m

Optic

Linear lens

Beam Direction

Adjustable: tilting +/- 355°,
Asymmetrical

Material

PMM

LED quantity

233 LED/m

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80
2500K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90
5000K CRI>80

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

S 14mm x H 12mm x L:

031 034 037 040
043 046 049 052
055 058 061 064
067 070 073 076
079 082 085 088
091 094 097 100
103 106 109 112
115 118

Material

Aluminum

Body finishes

Black
Gray

Weight

350gr/m

Mounting

On top

Fixing

Ring nut: cut out Ø 6mm

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Armonia Bridge linear lens


PHOTOMETRIC DATA (3000K CRI>90)

12W/m-40°x80° | UGR 25

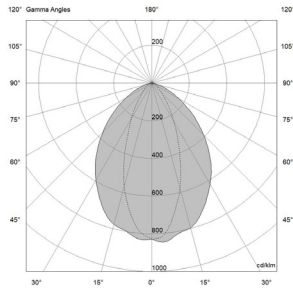

H (m)	D (m)	Eav (lx)
1	2.74	36
2	5.49	9
3	8.23	4
4	10.98	2
5	13.72	1

25W/m-40°x80° | UGR 28

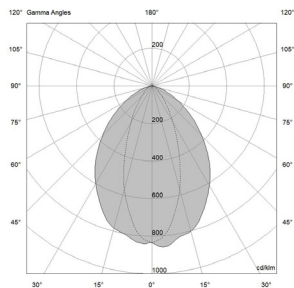

H (m)	D (m)	Eav (lx)
1	2.73	66
2	5.45	17
3	8.18	7
4	10.91	4
5	13.64	3

Total lumen output
1000 lm

Efficacy
83 lm/W

Total lumen output
1838 lm


Efficacy
73 lm/W

Armonia Bridge linear lens

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N

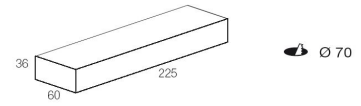

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI

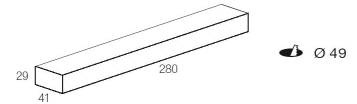

Other options upon request