
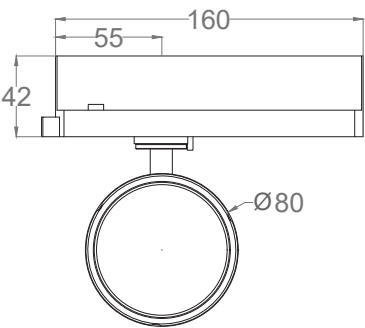


Aurora Zoom 3000

Track and surface zoom projectors | IP40 | Class II | Dimmable

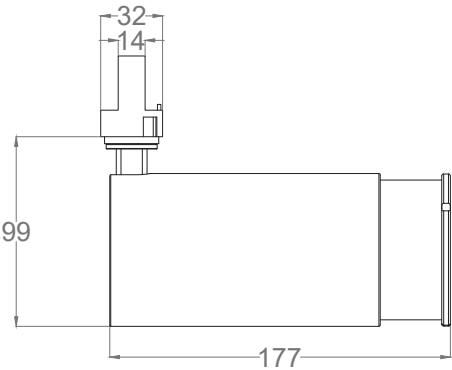

LIGHT SOURCE & OPTIC

- Power**
30W
- Lens**
Zoom 8°>45°
- Beam Direction**
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material
Glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 80mm x H 176 mm (cylinder)

Material
Aluminium

Body finishes
Black (RAL 9005)
White (RAL 9003)
All White (RAL 9003)

Weight
1050gr

Mounting
On Track

Fixing
Track Connector

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage: 220-240Vac
Typical Vf= 36V

Driver requirement
Built-in driver

Control
On/off
DALI

Aurora Zoom 3000

PHOTOMETRIC DATA (3000K CRI>80)

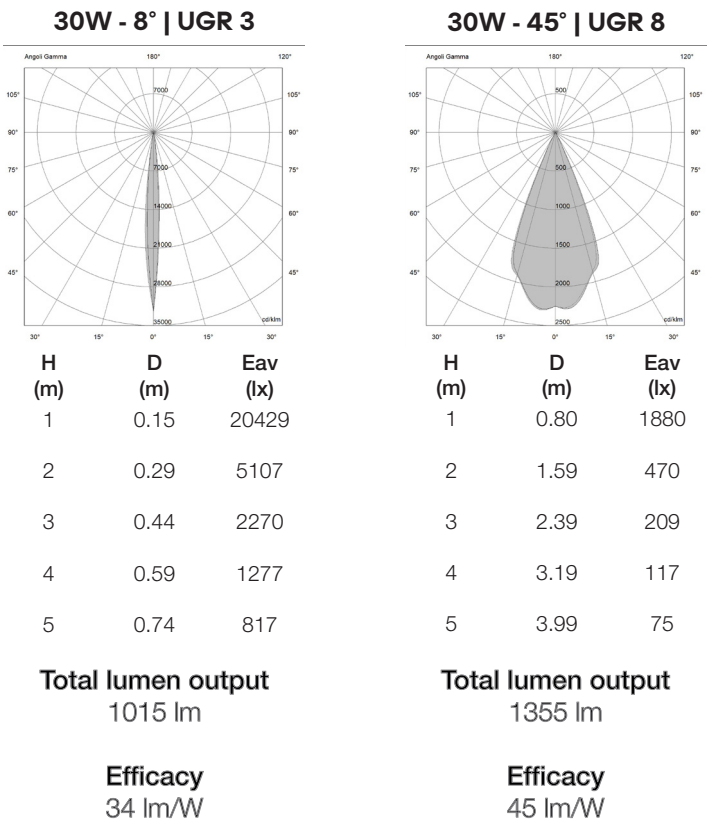

Aurora Zoom 3000

INSTALLATION ACCESSORIES

Compatible with 230Vac Track:

Surface and suspended track (A01668._0)
1m

