

LIGHT SOURCE

LED quantity	1
Power max	9 W - 18 W - 27W - 36W
Total lumen output (3000K)	9W: 10° - 520 lm 25° - 513 lm 40° - 430 lm 60° - 438 lm EII - 516 lm
Efficacy lm/W (3000K)	9W: 10° - 58 lm/W 25° - 57 lm/W 40° - 48 lm/W 60° - 48 lm/W EII - 57 lm/W
CRI	>80 - >90
LED Temperature	2200K CRI>90 - 2700K- 3000K- 3000K CRI>90 - 4000K CRI
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10° - 25° - 40° - 60° - Elliptical lens
Beam direction	Fixed
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum
Available body finishes	Hard coat anodized: 4 - Black
Recessed box finishes	Integral: 6 - Stainless steel AISI 316L
IP Rate	IP67
IK Rate	IK10
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES



Driver	Remote
Dimmable	Push, 1-10, DALI
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES

Dimensions	51 x 100 x 303-601-897-1191 mm (within box)
Weight	1100 gr - 2200 gr - 3300 gr - 4400 gr (without box)
Installation	Floor recessed
Cut-out	-
Use	Outdoor

ACCESSORIES

Filters	-
Visors	-
Box/ Frame	Recessed box
Installation tool	Suckers

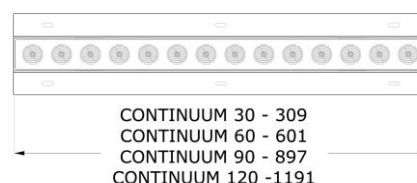

Recessed box included in the drawing

PHOTOMETRIC DATA

<div>Elliptical lens 10°x25° – 9W</div>						
<div>H(m)</div>	<div>D(m)</div>	<div>E_{max}(lx)</div>	<div>E_{av}(lx)</div>			
<div>EII</div>						
<div>1.00</div>	<div>0.15</div>	<div>2619</div>	<div>1869</div>			
<div>2.00</div>	<div>0.30</div>	<div>655</div>	<div>467</div>			
<div>3.00</div>	<div>0.44</div>	<div>291</div>	<div>208</div>			
<div>4.00</div>	<div>0.59</div>	<div>164</div>	<div>117</div>			
<div>5.00</div>	<div>0.74</div>	<div>105</div>	<div>75</div>			

<div>10° Lens – 9W</div>				<div>25° Lens – 9W</div>				<div>40° Lens – 9W</div>				<div>60° Lens – 9W</div>			
<div>H(m)</div>	<div>D(m)</div>	<div>E_{max}(lx)</div>	<div>E_{av}(lx)</div>	<div>H(m)</div>	<div>D(m)</div>	<div>E_{max}(lx)</div>	<div>E_{av}(lx)</div>	<div>H(m)</div>	<div>D(m)</div>	<div>E_{max}(lx)</div>	<div>E_{av}(lx)</div>	<div>H(m)</div>	<div>D(m)</div>	<div>E_{max}(lx)</div>	<div>E_{av}(lx)</div>
<div>10°</div>				<div>25°</div>				<div>40°</div>				<div>60°</div>			
<div>1.00</div>	<div>0.28</div>	<div>5806</div>	<div>3694</div>	<div>1.00</div>	<div>0.54</div>	<div>2199</div>	<div>1349</div>	<div>1.00</div>	<div>0.66</div>	<div>1053</div>	<div>638</div>	<div>1.00</div>	<div>1.38</div>	<div>486</div>	<div>260</div>
<div>2.00</div>	<div>0.56</div>	<div>1451</div>	<div>924</div>	<div>2.00</div>	<div>1.08</div>	<div>550</div>	<div>337</div>	<div>2.00</div>	<div>1.32</div>	<div>263</div>	<div>160</div>	<div>2.00</div>	<div>2.76</div>	<div>121</div>	<div>65</div>
<div>3.00</div>	<div>0.85</div>	<div>645</div>	<div>410</div>	<div>3.00</div>	<div>1.62</div>	<div>244</div>	<div>150</div>	<div>3.00</div>	<div>1.99</div>	<div>117</div>	<div>71</div>	<div>3.00</div>	<div>4.14</div>	<div>54</div>	<div>29</div>
<div>4.00</div>	<div>1.13</div>	<div>363</div>	<div>231</div>	<div>4.00</div>	<div>2.16</div>	<div>137</div>	<div>84</div>	<div>4.00</div>	<div>2.65</div>	<div>66</div>	<div>40</div>	<div>4.00</div>	<div>5.52</div>	<div>30</div>	<div>16</div>
<div>5.00</div>	<div>1.41</div>	<div>232</div>	<div>148</div>	<div>5.00</div>	<div>2.70</div>	<div>88</div>	<div>54</div>	<div>5.00</div>	<div>3.31</div>	<div>42</div>	<div>26</div>	<div>5.00</div>	<div>6.90</div>	<div>19</div>	<div>10</div>

NOTES

Recessed box is necessary for installing the fixture correctly: *Please specify always 1 box for each Continuum i IP67 in the purchase order.*

Equipped with 100 cm neoprene cable. Additional cable length available upon request.