


Continuum i IP67 Louver

Linear with Lenses | IP67 | Class III | Dimmable

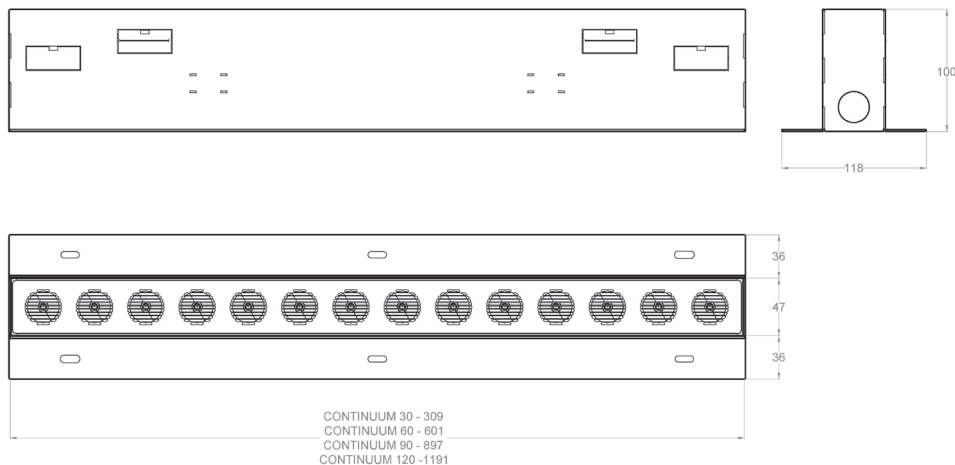

LIGHT SOURCE & OPTIC

Power

9W - 30cm 27W - 90 cm
18W - 60cm 36W - 120cm

Lens

10°/25°/40°/60°/Elliptical Lens

Beam Direction

Fixed
Symmetrical / Asymmetrical

Material

PMM

LED quantity

23 led/m

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>90/80
4000K CRI>80
TW 2700K-5000K

Lifetime (25°C)

L80 >60.000 hrs

Source flux (3000K CRI>90)

L 30cm: 841 lm

FIXTURE

Dimensions

47mm X 46mm X L
L:30-60-90-120cm

Material

Aluminium

Body finishes

Black

Weight

890 g - 30cm 2440 g - 90cm
1660 g - 60cm 3310 g - 120cm

Mounting

Floor recessed

Fixing

Recessed box

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Continuum i IP67 Louver

PHOTOMETRIC DATA (3000K CRI>80) Length 30cm

9W - 10° | UGR 9




H (m)	D (m)	Eav (lx)
1	0.20	3694
2	0.40	924
3	0.59	410
4	0.79	231
5	0.99	148

Total lumen output
520 lm

Efficacy
57 lm/W

9W - 25° | UGR 9




H (m)	D (m)	Eav (lx)
1	0.44	1349
2	0.88	337
3	1.32	150
4	1.76	84
5	2.20	54

Total lumen output
513 lm

Efficacy
57 lm/W

9W - 40° | UGR 14




H (m)	D (m)	Eav (lx)
1	0.56	638
2	1.12	160
3	1.68	71
4	2.24	40
5	2.80	26

Total lumen output
430 lm

Efficacy
47 lm/W

9W - 60° | UGR 17




H (m)	D (m)	Eav (lx)
1	1.38	260
2	2.76	65
3	4.14	29
4	5.52	16
5	6.90	10

Total lumen output
438 lm

Efficacy
48 lm/W

9W - 10°x50° | UGR 13



H (m)	D (m)	Eav (lx)
1	0.15 - 0.87	1869
2	0.30 - 1.74	467
3	0.44 - 2.62	208
4	0.59 - 3.49	117
5	0.74 - 4.36	75


Total lumen output
516 lm

Efficacy
57 lm/W

Continuum i IP67 Louver

INSTALLATION ACCESSORIES


Recessed box



Recessed box L 30 cm
in Stainless Steel AISI 316L

A01209.60


A01213.60



Recessed box L 60 cm
in Stainless Steel AISI 316L

A01210.60


A01214.60



Recessed box L 90 cm
in Stainless Steel AISI 316L

A01211.60

A01215.60




Recessed box L 120 cm
in Stainless Steel AISI 316L

A01212.60

A01216.60

Watertight connector

24Vdc




Watertight connector
24Vdc

A00357.40

SUGGESTED REMOTE DRIVERS

On/Off :


CV70-F-24-N



Ø 70

Dimmable (DALI 2, 0/1...10V, PUSH):


CC25-DM-24-NI



Ø 44

TW (DALI 2, DMX, RIPPLE FREE):

CV100-L-24-NL



Ø 57

Other options upon request