


Continuum with visor

Linear with Lenses | IP40 | Class III | Dimmable

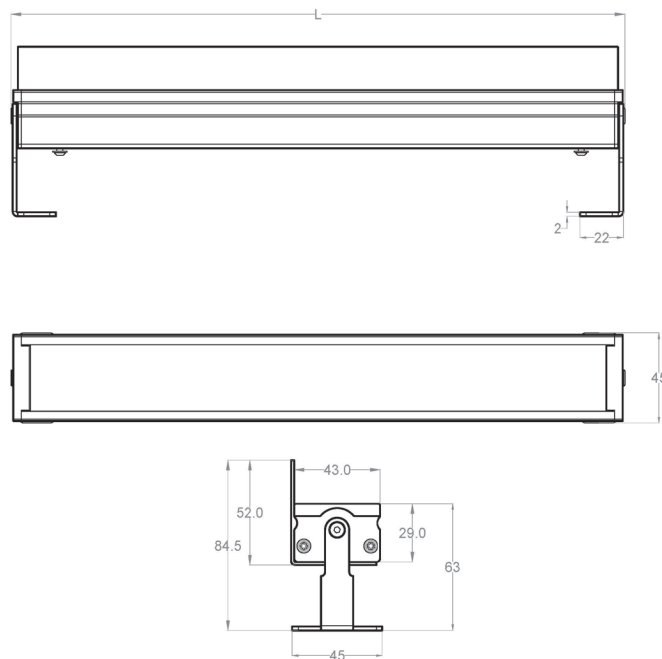

LIGHT SOURCE & OPTIC

Power

9W - 30cm	45W - 150cm
18W - 60cm	54W - 180cm
27W - 90 cm	63W - 210cm
36W - 120cm	

Lens

10°/25°/40°/60°/Elliptical Lens

Beam Direction

Adjustable: tilting +/- 90°,
Symmetrical / Asymmetrical

Material

PMM + glass

LED quantity

23 LED/m

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>90/80
4000K CRI>80
TW 2700K-5000K - L max 180 cm

Lifetime (25°C)

L80 >60.000 hrs

Output (3000K CRI>90)

L 30cm: 841 lm

FIXTURE

Dimensions

43 mm x 29 mm x L
L: 30 -60-90-120-150-180-210 cm

Material

Aluminium

Body finishes

Black

Weight

370 g - 30cm	1860 g - 150cm
750 g - 60cm	2240 g - 180cm
1120 g - 90cm	2690 g - 210cm
1490 g - 120cm	

Mounting

On surface

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Continuum with visor

PHOTOMETRIC DATA (3000K CRI>90 - Length 30cm)

9W - 10° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.26	5791
2	0.52	1448
3	0.78	643
4	1.04	362
5	1.30	232

Total lumen output
693 lm

Efficacy
77 lm/W

9W - 25° | UGR 14




H (m)	D (m)	Eav (lx)
1	0.54	1819
2	1.09	455
3	1.63	202
4	2.17	114
5	2.71	73

Total lumen output
697 lm

Efficacy
77 lm/W

9W - 40° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.57	1271
2	1.14	318
3	1.71	141
4	2.28	79
5	2.85	51

Total lumen output
611 lm

Efficacy
67 lm/W

9W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	1.38	290
2	2.76	73
3	4.14	32
4	5.51	18
5	6.89	12

Total lumen output
638 lm

Efficacy
70 lm/W

9W - 10°x50° | UGR 17



H (m)	D (m)	Eav (lx)
1	0.12 - 0.87	3114
2	0.25 - 1.74	779
3	0.37 - 2.62	346
4	0.49 - 3.49	195
5	0.61 - 4.36	125

Total lumen output
685 lm


Efficacy
76 lm/W

Continuum with visor

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N




Dimmable (DALI 2, 0/1...10V, PUSH):

CC25-DM-24-NI



TW (DALI 2, DMX, RIPPLE FREE):

CV100-L-24-NL



Other options upon request