
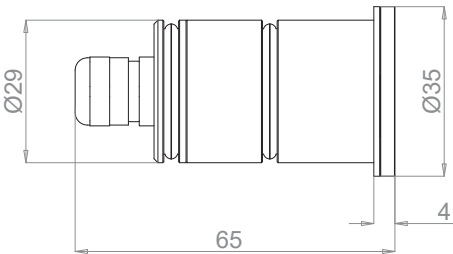


LEI IP67

Step Light | IP67 | Class III | Dimmable

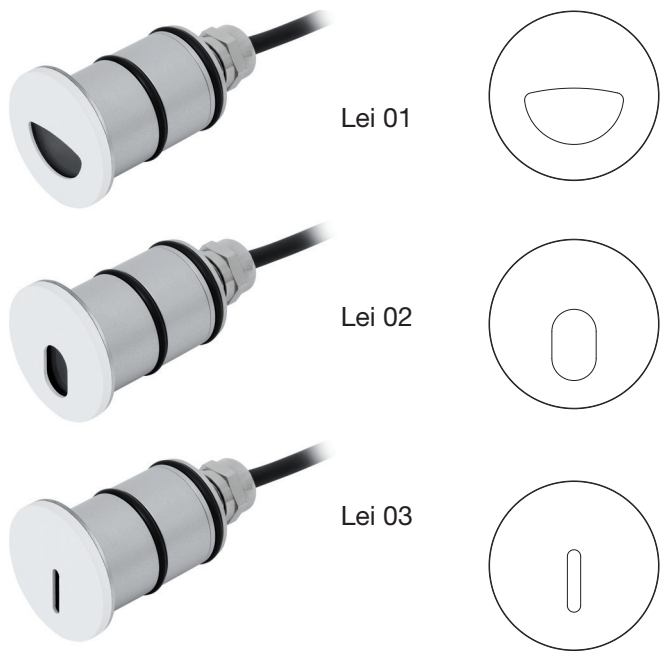

LIGHT SOURCE & OPTIC

Power

1,5W
1W
2W

Lens

45°

Beam Direction

Fixed

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>90
2700K CRI>90
3000K
4000K CRI>90

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 35mm x H 65mm

Material

Aluminium

Body finishes

Black
Grey
White (RAL9003)
Stainless Steel AISI316L

Weight

120gr

Mounting

Recessed

Fixing

Wall Recessed

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main Voltage:
24Vdc
350 mA
500 mA

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

LEI IP67

PHOTOMETRIC DATA (3000K CRI>80)

1W - 45° | UGR 33.8




H (m)	D (m)	Eav (lx)
1	2.17	53
2	4.34	13
3	6.51	6
4	8.68	3
5	10.85	2

Total lumen output
24 lm

Efficacy
24 lm/W

1W - 45° | UGR 33.7




H (m)	D (m)	Eav (lx)
1	2.09	54
2	4.17	13
3	6.26	6
4	8.35	3
5	10.43	2

Total lumen output
16 lm

Efficacy
15 lm/W

1W - 45° | UGR 30.1




H (m)	D (m)	Eav (lx)
1	1.70	33
2	3.40	8
3	5.10	4
4	6.81	2
5	8.51	1

Total lumen output
6 lm

Efficacy
6 lm/W

2W - 45° | UGR 34.8




H (m)	D (m)	Eav (lx)
1	2.41	38
2	4.82	9
3	7.22	4
4	9.63	2
5	12.04	2

Total lumen output
32 lm

Efficacy
16 lm/W

2W - 45° | UGR 34.9




H (m)	D (m)	Eav (lx)
1	2.11	39
2	4.21	10
3	6.32	4
4	8.43	2
5	10.53	2

Total lumen output
22 lm

Efficacy
11 lm/W

2W - 45° | UGR 30.3




H (m)	D (m)	Eav (lx)
1	1.71	24
2	3.42	6
3	5.13	3
4	6.84	1
5	8.55	1

Total lumen output
8 lm


Efficacy
4 lm/W

INSTALLATION ACCESSORIES


Recessed box (A00249.40)




Micro watertight connector (A00357.40)




Recessed box (A01451.40)




Spring mounting support (A01457.60)




Frame trimless installation (A01453._0)



Frame trimless installation (A01452.30)



Recessed box for concrete (A01565.30)




Hole saw (A00832.H0)



SUGGESTED REMOTE DRIVER

On/off:

CC14-F-350-PI / CC14-F-500-PI
CV30-F-24-PI



Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-D-350-P / CC20-D-500-P
CV25-D-24-PI

