


## Projectors



### Macro IP67

500 / 700 / 900mA Lumen Output 3000K	3W 900mA - 200 lm	6W 500mA - 450 lm	9W 700mA - 600 lm
3° Lens	7T3694.____-UL		
10° Lens		733693.____-UL	733717.____-UL
30° Lens		763693.____-UL	763717.____-UL
50° Lens		7D3693.____-UL	7D3717.____-UL


24V Lumen Output 3000K	3W 24Vdc - 200 lm	6W 24Vdc - 450 lm	9W 24Vdc - 600 lm
3° Lens	7TA863.____-UL		
10° Lens		73A862.____-UL	73A866.____-UL
30° Lens		76A862.____-UL	76A866.____-UL
50° Lens		7DA862.____-UL	7DA866.____-UL

### Macro IP67 with hex louver

500 / 700 / 900mA Lumen Output 3000K	3W 900mA - 130 lm	6W 500mA - 310 lm	9W 700mA - 390 lm
3° Lens	7T3696.____-UL		
10° Lens		733695.____-UL	733718.____-UL
30° Lens		763695.____-UL	763718.____-UL
50° Lens		7D3695.____-UL	7D3718.____-UL

24V Lumen Output 3000K	3W 24Vdc - 130 lm	6W 24Vdc - 310 lm	9W 24Vdc - 390 lm
3° Lens	7TA865.____-UL		
10° Lens		73A864.____-UL	73A867.____-UL
30° Lens		76A864.____-UL	76A867.____-UL
50° Lens		7DA864.____-UL	7DA867.____-UL

FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● T Titanium	● Y 2700K	K Stake
● 3 Gray	● 6 3000K	C Tree strap mounting
	● W 3000K CRI > 90	
	● J 3500K	
	● 9 4000K	

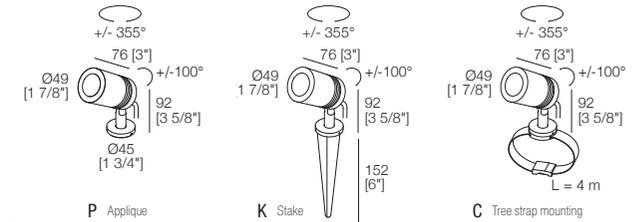

discover more

#### SUGGESTED DRIVERS (not included)

500mA	CC36-R-500-NF	p. 245
700mA	CC36-R-700-NF	p. 245
900mA	CC36-R-900-NF	p. 246
24Vdc	CV60-R-24-M	p. 248

#### ACCESSORIES

 49 [1 7/8"] Ø56 [2 1/4"] 9 [3/8"] Low glare visor A00519._0	 49 [1 7/8"] Ø56 [2 1/4"] Low glare snoot A00848._0
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------

#### EXAMPLE CODE COMPOSITION

