

MACRO IP68 30° with hex louver



LIGHT SOURCE

LED quantity	1
Power max	6 W – 9W
Total lumen output (3000K)	274 lm - 343 lm
Efficacy lm/W (3000K)	46 lm/W - 38 lm/W
LOR (3000K)	49% - 46%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 500mA – 700mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

NOTES

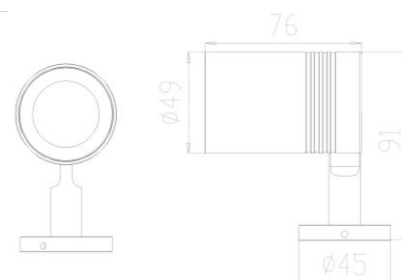

9W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
30°			
1.00	0.41	1871	1170
2.00	0.82	468	292
3.00	1.23	208	130
4.00	1.64	117	73
5.00	2.05	75	47