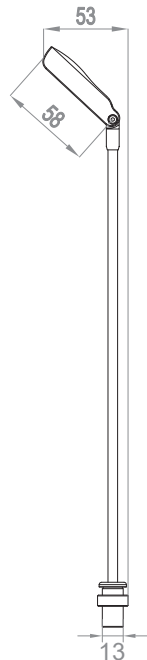



Maestro

Showcase lighting | IP40 | Class III | Dimmable



LIGHT SOURCE & OPTIC

Power
4W

Lens
10°/30°/40°/60°
Elliptical / Accent / Soft / Fade

Beam Direction
Adjustable:
Tilting +/- 125°, Rotating +/- 355°

Material
PMMA

LED quantity
4

Binning
2 MacAdam steps

Color temperature & quality
2200K
2700K CRI>80/90
3000K CRI>80/90
4000K CRI>80/90
5000K

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
54 mm x 16 mm (head)
300 mm (pole)

Material
Aluminium

Body finishes
Black
Titanium
Champagne Gold
Gray

Weight
50gr

Mounting
On telescopic pole: cut out Ø 13,5 mm

Fixing
Ring Nut

Working temperature
-20° / +40°

ELECTRICAL FEATURES









Power supply
Constant current:
350 mA
Typical Vf= 4 x 3V

Driver requirement
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Maestro

PHOTOMETRIC DATA (3000K CRI>80)


<div>4W - 10° UGR 12.7</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.27</td><td>3471</td></tr><tr><td>2</td><td>0.54</td><td>868</td></tr><tr><td>3</td><td>0.80</td><td>386</td></tr><tr><td>4</td><td>1.07</td><td>217</td></tr><tr><td>5</td><td>1.34</td><td>139</td></tr></table><div>Total lumen output 406 lm</div><div>Efficacy 106 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.27	3471	2	0.54	868	3	0.80	386	4	1.07	217	5	1.34	139	<div>4W - 30° UGR 19.6</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.42</td><td>1381</td></tr><tr><td>2</td><td>0.85</td><td>345</td></tr><tr><td>3</td><td>1.27</td><td>153</td></tr><tr><td>4</td><td>1.69</td><td>86</td></tr><tr><td>5</td><td>2.12</td><td>55</td></tr></table><div>Total lumen output 373 lm</div><div>Efficacy 95 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.42	1381	2	0.85	345	3	1.27	153	4	1.69	86	5	2.12	55	<div>4W - 40° UGR 23</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.65</td><td>765</td></tr><tr><td>2</td><td>1.31</td><td>191</td></tr><tr><td>3</td><td>1.96</td><td>85</td></tr><tr><td>4</td><td>2.62</td><td>48</td></tr><tr><td>5</td><td>3.27</td><td>31</td></tr></table><div>Total lumen output 381 lm</div><div>Efficacy 96 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.65	765	2	1.31	191	3	1.96	85	4	2.62	48	5	3.27	31	<div>4W - 60° UGR 25</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.99</td><td>456</td></tr><tr><td>2</td><td>1.98</td><td>114</td></tr><tr><td>3</td><td>2.98</td><td>51</td></tr><tr><td>4</td><td>3.97</td><td>28</td></tr><tr><td>5</td><td>4.96</td><td>18</td></tr></table><div>Total lumen output 367 lm</div><div>Efficacy 92 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.99	456	2	1.98	114	3	2.98	51	4	3.97	28	5	4.96	18
H (m)	D (m)	Eav (lx)																																																																									
1	0.27	3471																																																																									
2	0.54	868																																																																									
3	0.80	386																																																																									
4	1.07	217																																																																									
5	1.34	139																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.42	1381																																																																									
2	0.85	345																																																																									
3	1.27	153																																																																									
4	1.69	86																																																																									
5	2.12	55																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.65	765																																																																									
2	1.31	191																																																																									
3	1.96	85																																																																									
4	2.62	48																																																																									
5	3.27	31																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.99	456																																																																									
2	1.98	114																																																																									
3	2.98	51																																																																									
4	3.97	28																																																																									
5	4.96	18																																																																									
<div>4W - Elliptical UGR 13.4</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.29</td><td>1342</td></tr><tr><td>2</td><td>0.59</td><td>335</td></tr><tr><td>3</td><td>0.88</td><td>149</td></tr><tr><td>4</td><td>1.18</td><td>84</td></tr><tr><td>5</td><td>1.47</td><td>54</td></tr></table><div>Total lumen output 378 lm</div><div>Efficacy 96 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.29	1342	2	0.59	335	3	0.88	149	4	1.18	84	5	1.47	54	<div>4W - Accent UGR 20.2</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.30</td><td>2029</td></tr><tr><td>2</td><td>0.60</td><td>507</td></tr><tr><td>3</td><td>0.90</td><td>225</td></tr><tr><td>4</td><td>1.20</td><td>127</td></tr><tr><td>5</td><td>1.50</td><td>81</td></tr></table><div>Total lumen output 392 lm</div><div>Efficacy 101 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.30	2029	2	0.60	507	3	0.90	225	4	1.20	127	5	1.50	81	<div>4W - Fade UGR 21.1</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.76</td><td>1157</td></tr><tr><td>2</td><td>1.52</td><td>289</td></tr><tr><td>3</td><td>2.28</td><td>129</td></tr><tr><td>4</td><td>3.05</td><td>72</td></tr><tr><td>5</td><td>3.81</td><td>46</td></tr></table><div>Total lumen output 375 lm</div><div>Efficacy 95 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	0.76	1157	2	1.52	289	3	2.28	129	4	3.05	72	5	3.81	46	<div>4W - Soft UGR 23.3</div> <div></div> <div><table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>2.55</td><td>43</td></tr><tr><td>2</td><td>5.10</td><td>11</td></tr><tr><td>3</td><td>7.66</td><td>5</td></tr><tr><td>4</td><td>10.21</td><td>3</td></tr><tr><td>5</td><td>12.76</td><td>2</td></tr></table><div>Total lumen output 370 lm</div><div>Efficacy 94 lm/W</div></div>	H (m)	D (m)	Eav (lx)	1	2.55	43	2	5.10	11	3	7.66	5	4	10.21	3	5	12.76	2
H (m)	D (m)	Eav (lx)																																																																									
1	0.29	1342																																																																									
2	0.59	335																																																																									
3	0.88	149																																																																									
4	1.18	84																																																																									
5	1.47	54																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.30	2029																																																																									
2	0.60	507																																																																									
3	0.90	225																																																																									
4	1.20	127																																																																									
5	1.50	81																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.76	1157																																																																									
2	1.52	289																																																																									
3	2.28	129																																																																									
4	3.05	72																																																																									
5	3.81	46																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	2.55	43																																																																									
2	5.10	11																																																																									
3	7.66	5																																																																									
4	10.21	3																																																																									
5	12.76	2																																																																									

SUGGESTED REMOTE DRIVER

On/off:
CC20-F-350-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CC25-DM-350-N



Other options upon request