


Micro H350 with hex louver

Bollards | IP67 | Class III | Dimmable

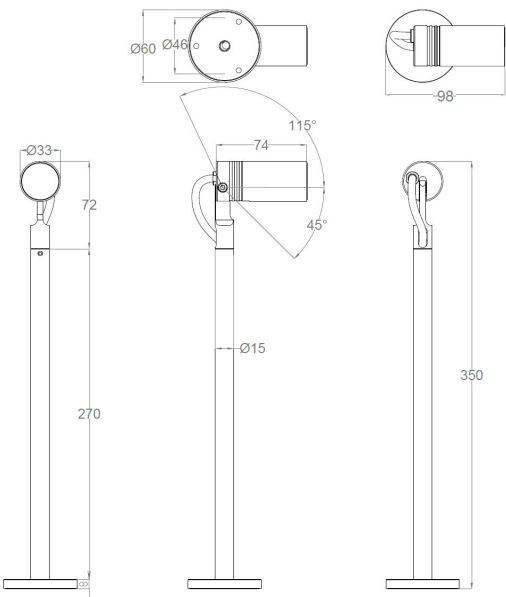

LIGHT SOURCE & OPTIC

Power
3W (350 mA)
4W (24 Vdc)

Lens
15°
30°
60°
Elliptical
Frosted Glass

Beam Direction
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
3

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime (Ta 25°)
L90>60.000 hrs

FIXTURE

Dimensions
Ø 33mm x L 64mm (cylinder)
H 350 mm

Material
Aluminium, Brass

Body finishes
Black
Moka
Anthracite Gray
Olive green
Gray

Weight
350gr

Mounting
On surface

Fixing
Applique
Stake
Tree strap mounting

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 3x3V
Constant tension:
24Vdc

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Feature
Water Infiltration Protection System


Micro H350 with hex louver

INTERCHANGEABLE ACCESSORIES


Low glare visor (A00846._0)




Low glare snoot (A00847._0)



Anchor for concrete (A00942.60)




Stainless Steel stake (A00851.60)



INSTALLATION ACCESSORIES

Watertight connector (A00387.40)




SUGGESTED REMOTE DRIVERS


On/Off :
CC14-F-350-PI




CV30-F-24-PI



**Multifunction (DALI 2, 0/1-10V, PUSH
RIPPLE FREE, AM DIMMING):**
CC20-D-350-P



CV25-D-24-PI



Other options upon request