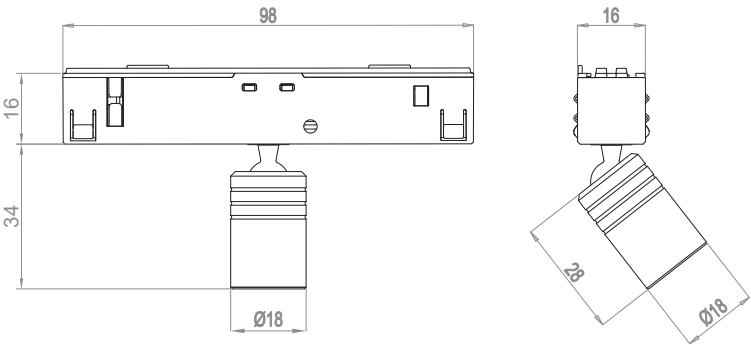


Mini Tini B Multi

Projectors | IP40 | Class III | Dimmable



LIGHT SOURCE & OPTIC

Power

2W
3W

Lens

10/25°/40°/60°

Beam Direction

Adjustable:
Tilting +/-90°, rotating +/-355°
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90
5000K

Lifetime

(L90) >60.000 hrs

FIXTURE

Dimensions

Ø 18mm x H 30mm (cylinder)

Material

Aluminium

Body finishes

Black (RAL 9005)
Dark Bronze
White (RAL 9003)

Weight

35gr

Mounting

On track

Fixing

Track Connector

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main Voltage:
24-48Vdc

Driver requirement









Remote (not included)

Control

On/off
DALI
Broadcast

Mini Tini B Multi


PHOTOMETRIC DATA (3000K CRI>90)

2W - 10° UGR 9.7				2W - 25° UGR 13.3				2W - 40° UGR 25,6				2W - 60° UGR 29.3			
															
H	D	Eav		H	D	Eav		H	D	Eav		H	D	Eav	
(m)	(m)	(lx)		(m)	(m)	(lx)		(m)	(m)	(lx)		(m)	(m)	(lx)	
1	0.23	942		1	0.33	526		1	0.66	125		1	1.13	59	
2	0.45	236		2	0.65	131		2	1.33	31		2	2.27	15	
3	0.68	105		3	0.98	58		3	1.99	14		3	3.40	7	
4	0.90	59		4	1.31	33		4	2.65	8		4	4.53	4	
5	1.13	38		5	1.63	21		5	3.31	5		5	5.67	2	
Total lumen output				Total lumen output				Total lumen output				Total lumen output			
74 lm				80 lm				66 lm				63 lm			
Efficacy				Efficacy				Efficacy				Efficacy			
40 lm/W				41 lm/W				33 lm/W				31 lm/W			
3W - 10° UGR 11.3				3W - 25° UGR 14.5				3W - 40° UGR 26				3W - 60° UGR 30.6			
															
H	D	Eav		H	D	Eav		H	D	Eav		H	D	Eav	
(m)	(m)	(lx)		(m)	(m)	(lx)		(m)	(m)	(lx)		(m)	(m)	(lx)	
1	0.23	1267		1	0.33	699		1	0.66	170		1	1.14	79	
2	0.45	317		2	0.65	175		2	1.32	43		2	2.27	20	
3	0.68	141		3	0.98	78		3	1.98	19		3	3.43	9	
4	0.90	79		4	1.31	44		4	2.64	11		4	4.57	5	
5	1.13	51		5	1.64	28		5	3.30	7		5	5.72	3	
Total lumen output				Total lumen output				Total lumen output				Total lumen output			
100 lm				107 lm				87 lm				84 lm			
Efficacy				Efficacy				Efficacy				Efficacy			
36 lm/W				37 lm/W				30 lm/W				28 lm/W			


Mini Tini B Multi

SUGGESTED REMOTE DRIVER

On/off:
CV20-F-24-N / CV70-F-24-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CV25-DM-24-NI / CV100-L-24-NL



Other options upon request