


Projectors

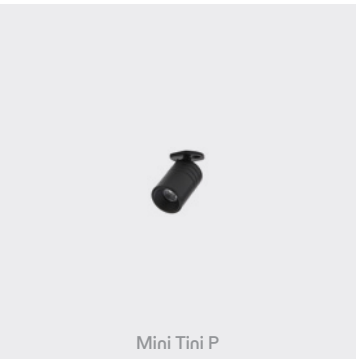


IP40

350
500


30 g

2


C **UL** US
LISTED



G Ring Nut



M Magnetic



P Applique

	350 / 500mA	1W	2W
	Lumen Output 3000K csi > 90	350mA - 80 lm	500mA - 110 lm
	10° Lens	7A3742. _ _ _ -UL	7A3743. _ _ _ -UL
	25° Lens	7G3742. _ _ _ -UL	7G3743. _ _ _ -UL
	40° Lens	743742. _ _ _ -UL	743743. _ _ _ -UL
	60° Lens	753742. _ _ _ -UL	753743. _ _ _ -UL

FINISH	CCT	FIXING
4 Black	U 2200K	G Ring Nut
T Titanium	X 2700K CRI > 90	M Magnetic
Z Champagne Gold	W 3000K CRI > 90	P Applique
3 Gray	K 3500K CRI > 90	
7 White	D 4000K CRI > 90	
	1 5000K	



SUGGESTED DRIVERS (not included)

350mA	CC36-R-350-NF	p. 244
500mA	CC36-R-500-NF	p. 245

ACCESSORIES

40 [1 5/8"] 40 [1 5/8"]



Template for P Applique fixing
A01658.60

EXAMPLE CODE COMPOSITION

