


Nova

Asymmetric linear | IP40 | Class III | Dimmable




LED position

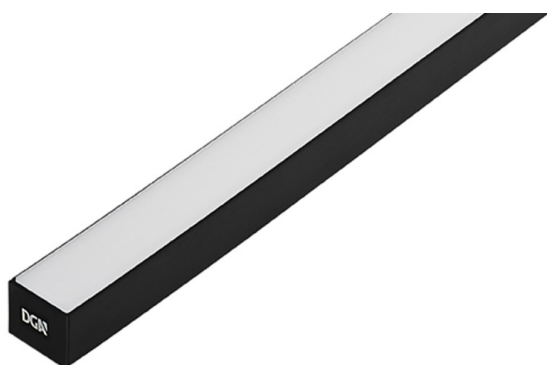


X

Symmetric




Y

Asymmetric




Z

Double Asymmetric



Integrated Fixing*

Magnetic fixing Double sided tape Adjustable bracket Mounting clip

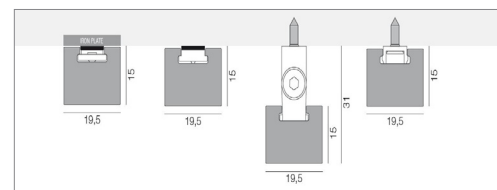

LIGHT SOURCE & OPTIC

Power

LED position X-Y

8W
12W
16W
19W
23W

LED position Z:

16W
24W
30W

Covers

Light opal cover (20%)
Milky cover (32°)
Black ghost cover (80%)

Beam Direction

Fixed/Adjustable, Asymmetrical

Material

Polycarbonate

LED quantity

233 (X-Y) / 466 (Z)

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2500K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

D 10mm x H 15mm x L:

004 007 010 013 016 019 022 025 028 031
034 037 040 043 046 049 052 055 058 061
064 067 070 073 076 079 082 085 088 091
094 097 100 103 106 109 112 115 118 121
124 127 130 133 136 139 142 145 148 151
154 157 160 163 166 169 172 175 178 181
184 187 190 193 196 199 202 205 208 211
214 217 220 223 226 229 232 235 238 241
244 247 250 253 256 259 262 265 268 271
274 277 280 283 286 289 292 295 298

Material

Aluminium

Body finishes

Black
Gray

Weight

340gr/m

End caps

Aluminium
Transparent

Mounting

On surface

Fixing*

Magnetic fixing
Double sided tape
Adjustable Bracket
Mounting Clip

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Cable exit

Cap exit left

In&Out cap exit

Cap exit right

Left side exit

In&Out side exit

Right side exit

Back exit left


Back in&out exit

Back exit right



PHOTOMETRIC DATA (3000K CRI>90 - Milky cover - X led position)

8W/m - 110° | UGR 23

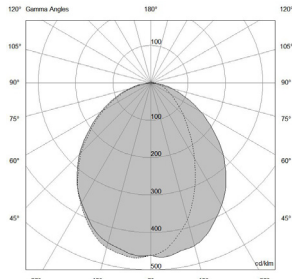


H (m)	D (m)	Eav (lx)
1	3.11	20
2	6.21	5
3	9.32	2
4	12.43	1
5	15.53	1

Total lumen output
454 lm

Efficacy
57 lm/W

12W/m - 110° | UGR 24

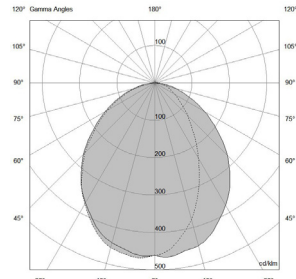


H (m)	D (m)	Eav (lx)
1	3.04	52
2	6.08	13
3	9.12	6
4	12.17	3
5	15.21	2

Total lumen output
734 lm

Efficacy
61 lm/W

16W/m - 110° | UGR 25

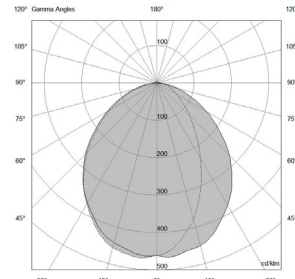


H (m)	D (m)	Eav (lx)
1	3.06	41
2	6.11	10
3	9.17	5
4	12.22	3
5	15.28	2

Total lumen output
942 lm

Efficacy
59 lm/W

19W/m - 110° | UGR 26

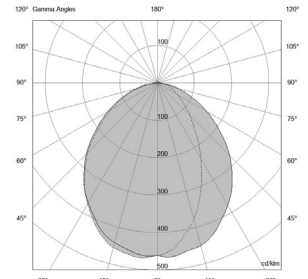


H (m)	D (m)	Eav (lx)
1	3.06	50
2	5.13	13
3	9.19	6
4	12.25	3
5	15.32	2

Total lumen output
1164 lm

Efficacy
61 lm/W

23W/m - 110° | UGR 27

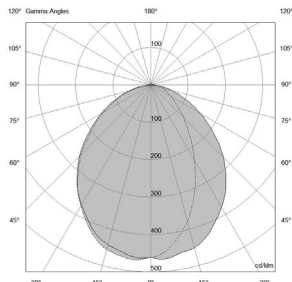


H (m)	D (m)	Eav (lx)
1	3.06	61
2	6.13	15
3	9.19	7
4	12.26	4
5	15.32	2

Total lumen output
1422 lm

Efficacy
62 lm/W


PHOTOMETRIC DATA (3000K CRI>90 - Milky cover - Y led position)

8W/m - 115° | UGR 24

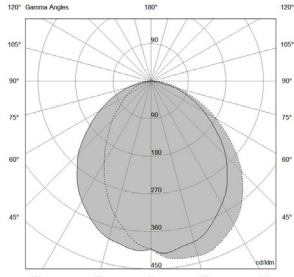

PHOTOMETRIC DATA (3000K CRI>90 - Milky cover - Z led position)

16W/m - 120° | UGR 28

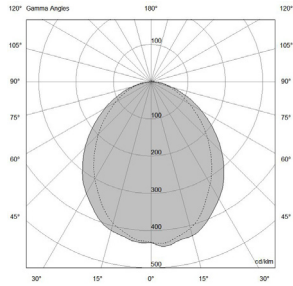


H (m)	D (m)	Eav (lx)
1	3.08	38
2	6.15	9
3	9.23	4
4	12.31	2
5	15.39	2

Total lumen output
886 lm

Efficacy
55 lm/W

24W/m - 120° | UGR 29

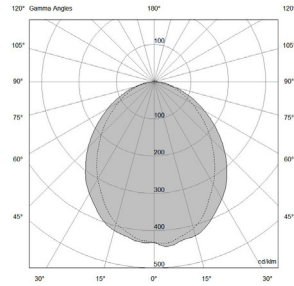


H (m)	D (m)	Eav (lx)
1	3.09	63
2	6.17	16
3	9.26	7
4	12.35	4
5	15.44	3

Total lumen output
1478 lm

Efficacy
62 lm/W

30W/m - 120° | UGR 30

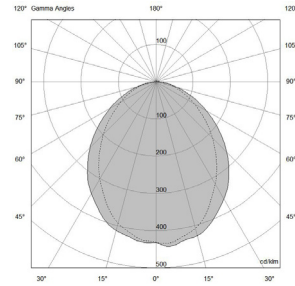

H (m)	D (m)	Eav (lx)
1	2.99	88
2	5.99	22
3	8.98	10
4	11.97	6
5	14.96	4


Total lumen output
1958 lm

Efficacy
65 lm/W

INSTALLATION ACCESSORIES

Iron plate (A01746.H0)


Only for Nova with magnetic fixing




SUGGESTED REMOTE DRIVERS

On/Off :

CV70-F-24-N

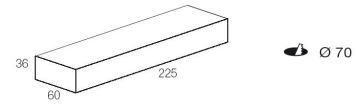**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV75-DM-24-NI

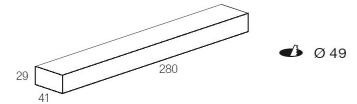

Other options upon request