

LIGHT SOURCE

LED quantity	1
Power max	15 W
Total lumen output (3000K)	15W: 20° - 617 lm 30° - 748 lm
Efficacy lm/W (3000K)	15W: 20° - 41 lm/W 30° - 50 lm/W
CRI	>80
LED Temperature	2700K – 3000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	20° - 30°
Beam direction	Fixed
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black B - Dark bronze
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES



Driver	-
Dimmable	-
Connection	In parallel at 220-240 Vac
Class	I

MECHANICAL FEATURES

Dimensions	Ø80 x 114 mm
Weight	530 gr
Installation	Wall, floor recessed
Cut-out	Ø70 mm (recessed box A00862.30)
Use	Outdoor

ACCESSORIES

Visors	-
Filters	-
Box/ Frame	Recessed box
Fixing system	-

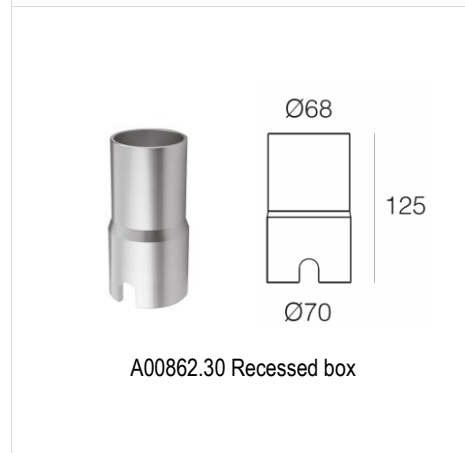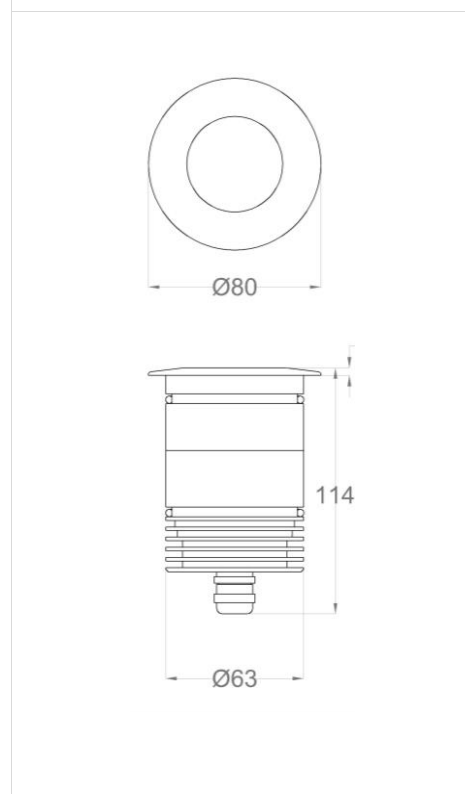

PHOTOMETRIC DATA

20° Lens – 15W				30° Lens – 15W					
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)		
20°				30°					
<u>1.00</u>	0.35	4224	2690	<u>1.00</u>	0.54	2458	1505		
<u>2.00</u>	0.69	1056	672	<u>2.00</u>	1.08	615	376		
<u>3.00</u>	1.04	469	299	<u>3.00</u>	1.62	273	167		
<u>4.00</u>	1.39	264	168	<u>4.00</u>	2.16	154	94		
<u>5.00</u>	1.73	169	108	<u>5.00</u>	2.71	98	60		

NOTES

DRIVERLESS Technology:

Connect directly to the line voltage to 220-240Vac.

Provided with 100 cm neoprene cable.