



Odino IP67 solovetro

Recessed Light | IP67 | Class III | Dimmable

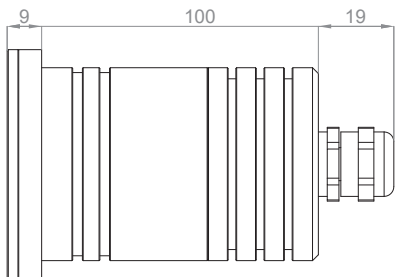

LIGHT SOURCE & OPTIC

Power
6W

Lens
30°
50° Reflector

Beam Direction
Fixed

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K
3000K

Lifetime
(L90) >55.000 hrs

FIXTURE

Dimensions
Ø 59mm x H 100mm

Material
Aluminium

Body finishes
Black
Campagne Gold
Grey

Weight
400gr

Mounting
Recessed

Fixing
Wall - Floor Recessed

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage:
220-240 Vac

Driver requirement
Built-in

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Odino IP67 solovetro


PHOTOMETRIC DATA (3000K CRI>80)

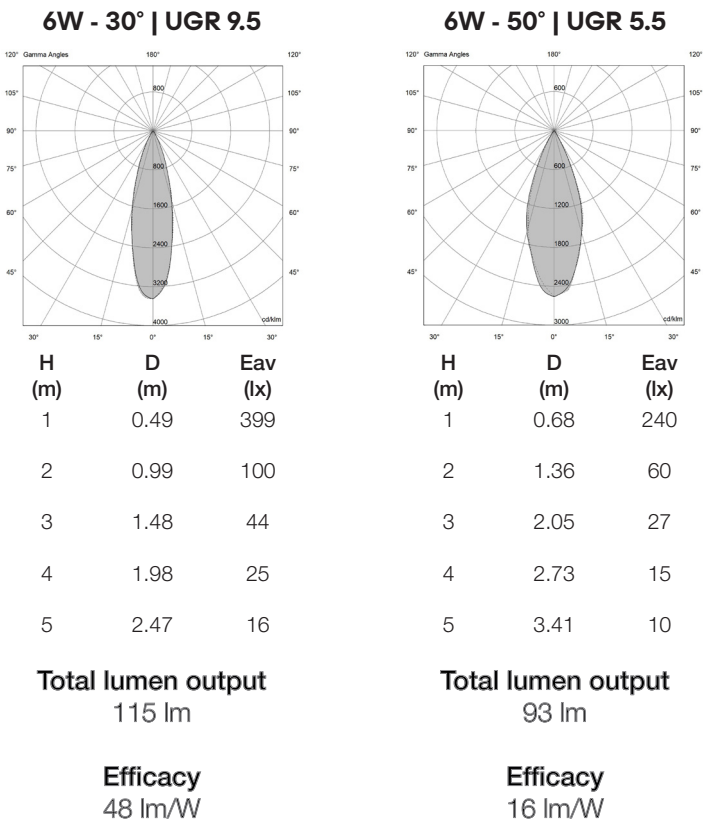

INSTALLATION ACCESSORIES

Recessed box in alluminium with edge
(A00642._ 0)


Ø67



Ø62


Recessed box in plastic with closure cap
(A00643.40)

Ø60



Ø55

Watertight connector (A01023.40)



removing tool (A01292.30)

