


# Operaprima with snoot

Showcase lighting | IP40 | Class III | Dimmable

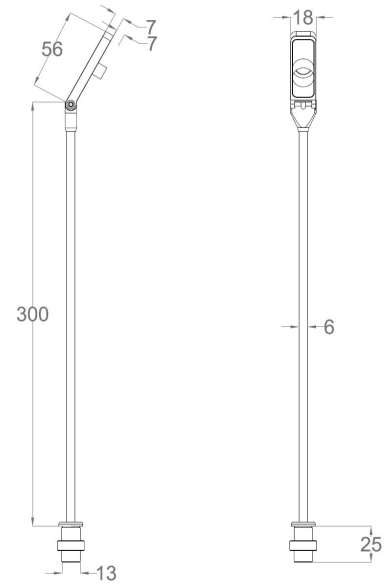

## LIGHT SOURCE & OPTIC

### Power

4W

### Zoom Lens

60°

### Beam Direction

Adjustable:  
Tilting +/-170°, Rotating +/-355°  
Symmetrical

### Material

PMMA

### LED quantity

1

### Binning

2 MacAdam steps

### Color temperature & quality

2700K CRI>90  
3000K CRI>80/90  
4000K CRI>90  
5000K CRI>80

### Lifetime

(L90) >55.000 hrs

## FIXTURE

### Dimensions

60mm x 18 mm (head) x Hmax 300mm

### Material

Aluminium

### Module finishes

Black  
Champagne gold  
Gray  
White (RAL 9003)

### Weight

60gr

### Mounting

On telescopic pole: cut out Ø 13,5mm

### Fixing

Screw base

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:  
350 mA  
Typical Vf= 3V

### Driver requirement

Remote (not included)


### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Operaprima with snoot

PHOTOMETRIC DATA (3000K CRI>80)

4W - 60° | UGR 32

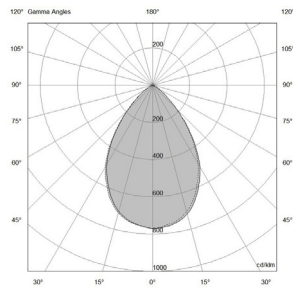

H (m)	D (m)	Eav (lx)
1	0.85	195
2	1.68	49
3	2.52	22
4	3.36	12
5	4.20	8

Total lumen output  
200 lm


Efficacy  
50 lm/W

# Operaprima with snoot

## SUGGESTED REMOTE DRIVERS

### On/Off :


CC20-F-350-N



Ø 55

### Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):

CC25-DM-350-N



Ø 55

Other options upon request