
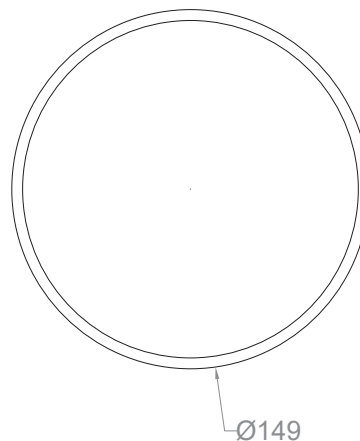


POIS 150

Surface lights | IP40 | Class III | Dimmable

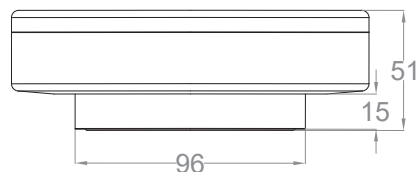

LIGHT SOURCE & OPTIC

Power

14W

Lens

Diffuse emission

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

126

Binning

2 MacAdam steps

Color temperature & quality

2700K
3000K CRI>80
3000K CRI>90
4000K

Lifetime

(L70) >54.000 hrs

FIXTURE

Dimensions

Ø 149mm x H 51mm

Material

Aluminium

Body finishes

Black (RAL 9005)
Intense Bronze
Gold
Agate Gray (RAL 7038)
OysterWhite (RAL1013)
White (RAL 9003)

Weight

1190gr

Mounting

Surface Mounting

Fixing

Applique, Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
24Vdc
Typical Vf= 24V

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

POIS 150

PHOTOMETRIC DATA (3000K CRI>90)

14W | UGR 27

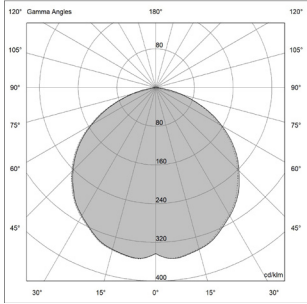


H (m)	D (m)	Eav (lx)
1	1.82	160
2	3.64	40
3	5.47	18
4	7.29	10
5	9.11	6

Total lumen output
670 lm


Efficacy
48 lm/W

SUGGESTED REMOTE DRIVERS**On/off:**

CV20-F-24-N

 Ø 60**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV25-DM-24-NI

 Ø 44

Other options upon request