


POIS 70

Surface lights | IP40 | Class III | Dimmable

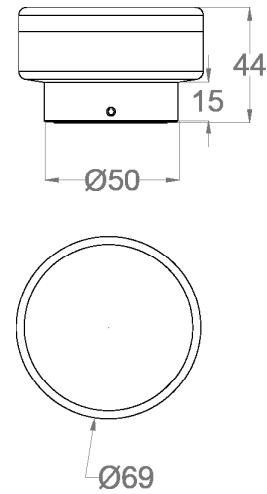

LIGHT SOURCE & OPTIC

Power

4W

Lens

Diffuse emission

Beam Direction

Fixed, Symmetrical

Material

Opal Glass

LED quantity

35

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>80

3000K CRI>80

3000K CRI>90

4000K CRI>80

Lifetime

L70 >54.000 hrs

Ouput (3000K CRI>90)

369 lm

FIXTURE

Dimensions

Ø 69mm x H 44mm

Material

Aluminium

Body finishes

Black (RAL 9005)

Intense Bronze

Gold

Agate Gray (RAL 7038)

OysterWhite (RAL1013)

White (RAL 9003)

Weight

225gr

Mounting

Surface Mounting

Fixing

Applique

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:

24Vdc

Typical Vf= 24V

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut


0/1-10 V

Casambi

DALI

PHOTOMETRIC DATA (3000K CRI>90)

4W | UGR 26

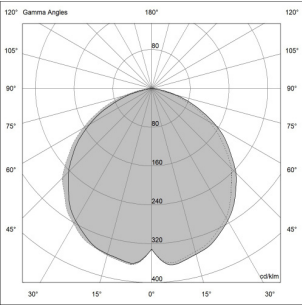

H (m)	D (m)	Eav (lx)
1	2.90	12
2	5.80	3
3	8.70	1
4	11.60	1
5	14.50	0


Total lumen output
131 lm

Efficacy
33 lm/W


SUGGESTED REMOTE DRIVERS

On/off:

CV20-F-24-N

 Ø 60**Multifunction (DALI 2, 0/1-10V, PUSH):**

CV25-DM-24-NI

 Ø 44

Other options upon request