

Saturno P IP67




Projectors



[1] 12° Lens not interchangeable

IP67 WIPS 350 500 24V 2 m 730 g 2 2,6 P&P TM 66

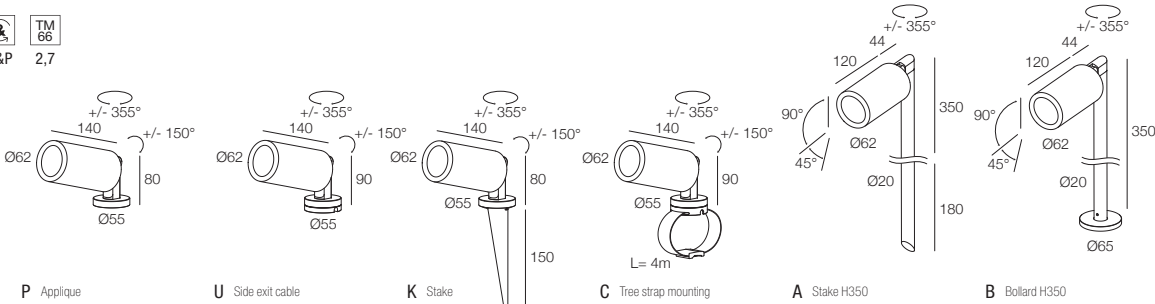

350 / 500mA	12W	18W
Lumen Output 3000K	350mA - 1250 lm	500mA - 1700 lm
12° Lens [1]	7Q4566	7Q4567
18° Lens	784566	784567
24° Lens	7G4566	7G4567
33° Lens	7E4566	7E4567
52° Lens	754566	754567

24V	14W	18W
Lumen Output 3000K	24Vdc - 1250 lm	24Vdc - 1700 lm
12° Lens [1]	7Q4722	7Q4723
18° Lens	784722	784723
24° Lens	7G4722	7G4723
33° Lens	7E4722	7E4723
52° Lens	754722	754723

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			




SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 704
500mA	CC20-F-500-PI	p. 704
24Vdc	CV30-F-24-PI	p. 708


ACCESSORIES




INTERCHANGEABLE ACCESSORIES  
p. 677



Low glare visor  
A01448\_0



Low glare snoot  
A01447\_0



Watertight connector p. 682  
A00387.40

EXAMPLE CODE COMPOSITION

