

LIGHT SOURCE

| | |
|----------------------------|--|
| LED quantity | 2 |
| Power max | 2 x 6W |
| Total lumen output (3000K) | 375 lm (bottom) + 407 lm (top) |
| Efficacy lm/W (3000K) | 62 lm/W-68 lm/W |
| LOR (3000K) | 71% |
| CRI | > 80 - >90 |
| LED Temperature (K) | 2700K - 3000K - 3000K CRI>90 - 3500K - 4000K |
| Average operational life | 50.000 hours |

OPTIC

| | |
|------------------|-----------------|
| Material | PMMA |
| Available optics | Asymmetric lens |
| Beam direction | Fixed |
| Flux symmetry | Asymmetrical |
| Accessories | - |

LED FIXTURE

| | |
|---------------------|--|
| Material | Aluminum |
| Finish | Painted (Black, Moka, Yellow olive, Anthracite gray) |
| Available finishes | Black, Moka, Yellow olive, Anthracite gray |
| IP Rate | IP67 |
| Working Temperature | -20° ÷ +40° |
| Accessories | - |

ELECTRICAL FEATURES

| | |
|------------------------|-----------------|
| Driver | Built-in driver |
| Dimmable | No |
| For emergency lighting | - |
| Connection | At 220-240 Vac |
| Class | II |



MECHANICAL FEATURES

| | |
|-----------------|------------------|
| Dimensions (mm) | 55 x 165 x H 900 |
| Weight | 3300 gr |
| Mounting | Floor |
| Cut-out (mm) | - |
| Use | Outdoor |

NOTES



design by Valerio Sommella & Anonima Luci

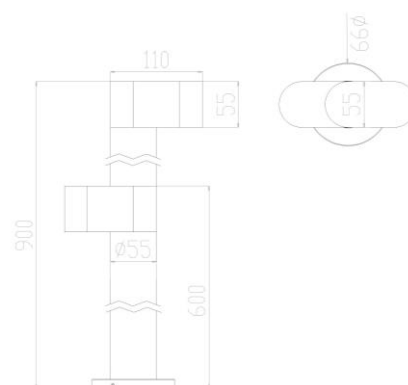

6W (top)

| H(m) | D(m) | E _{max} (lx) | E _{av} (lx) |
|-------------------|------|-----------------------|----------------------|
| Asymmetrical lens | | | |
| 0.18 | 0.11 | 21508 | 12033 |
| 0.36 | 0.21 | 5377 | 3008 |
| 0.54 | 0.32 | 2390 | 1337 |
| 0.72 | 0.43 | 1344 | 752 |
| 0.90 | 0.53 | 860 | 481 |