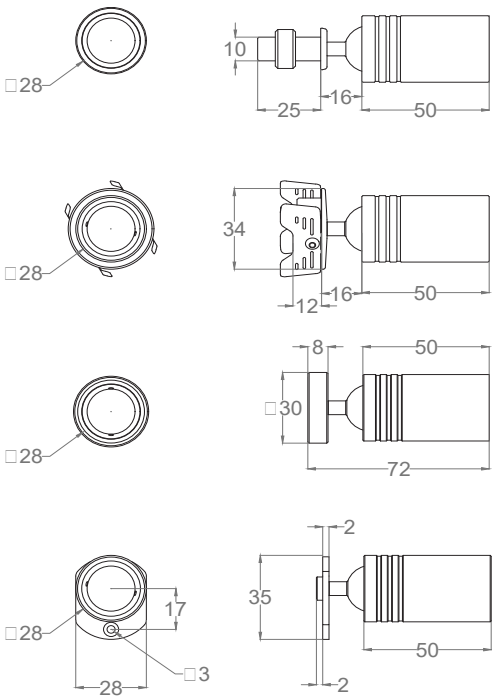


# Tini

Projectors | IP40 | Class III | Dimmable



## LIGHT SOURCE & OPTIC

### Power

1W  
2W  
3W

### Lens

10°/ 30°/40°/60°/Elliptical - 1W/2W  
15°/30°/60°/Elliptical - 3W

### Beam Direction

Adjustable: tilting +/-60°  
Symmetrical

### Material

PMMA

### LED quantity

1 ( 1/ 2W)  
3 (3 W)

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>80/90  
3000K CRI>80/90  
4000K CRI>80  
5000K CRI>80

### Lifetime (Ta 25°)

L80 >60.000 hrs

### Output (3000K CRI>90)

120 lm - 1W / 214 lm - 2W  
357 lm - 3W

## FIXTURE

### Dimensions

Ø 28mm x H 50mm (cylinder)

### Material

Aluminium

### Body finishes

Black  
Titanium  
Champagne Gold  
Gray  
White (RAL 9003)

### Weight

70gr

### Mounting

Surface/Semi-recessed

### Fixing

Ring Nut  
Springs  
Magnetic  
Applique

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:  
350 mA  
700 mA  
Typical Vf= 3V - 1W/2W  
Typical Vf= 3V x 3 - 3W

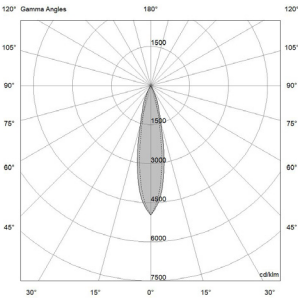
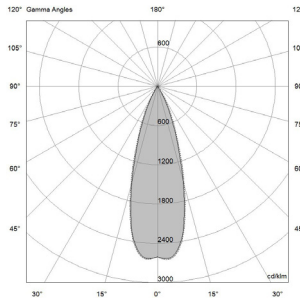
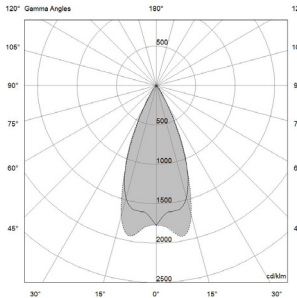
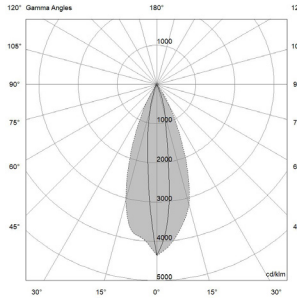
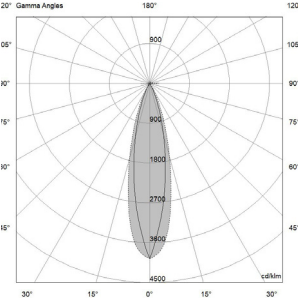
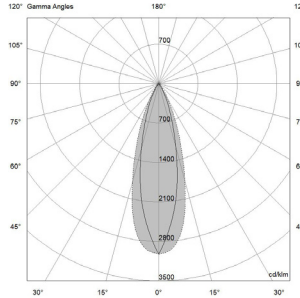
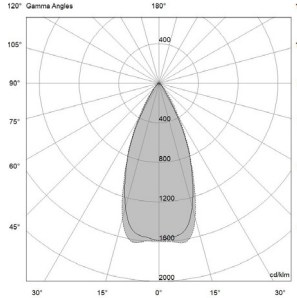
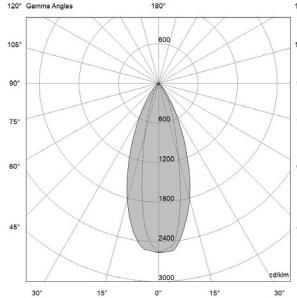
### Driver requirement

Remote (not included)

### Control


On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

PHOTOMETRIC DATA (3000K CRI>90)


2W - 10°   UGR 12			2W - 30°   UGR 10			2W - 40°   UGR 21			2W - 25°x40°   UGR 6		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.41	374	1	0.59	235	1	0.85	112	1	0.25-0.73	566
2	0.82	94	2	1.17	59	2	1.71	28	2	0.50-1.45	141
3	1.23	42	3	1.76	26	3	2.56	12	3	0.75-2.18	63
4	1.64	23	4	2.34	15	4	3.41	7	4	1.00-2.91	35
5	2.05	15	5	2.93	9	5	4.26	4	5	1.25-3.64	23
Total lumen output 115 lm			Total lumen output 134 lm			Total lumen output 104 lm			Total lumen output 108 lm		
Efficacy 58 lm/W			Efficacy 67 lm/W			Efficacy 52 lm/W			Efficacy 54 lm/W		
3W - 15°   UGR 15			3W - 30°   UGR 18			3W - 60°   UGR 19			3W - 25°x40°   UGR 14		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.49	462	1	0.45	328	1	0.85	119	1	0.44-0.75	452
2	0.98	115	2	0.89	82	2	1.69	30	2	0.89-1.50	113
3	1.47	51	3	1.34	36	3	2.54	13	3	1.33-2.25	50
4	1.95	29	4	1.78	21	4	3.39	7	4	1.78-3.00	28
5	2.44	18	5	2.23	13	5	4.23	5	5	2.22-3.75	18
Total lumen output 192 lm			Total lumen output 178 lm			Total lumen output 129 lm			Total lumen output 284 lm		
Efficacy 64 lm/W			Efficacy 60 lm/W			Efficacy 43 lm/W			Efficacy 95 lm/W		

## INTERCHANGEABLE ACCESSORIES

Low glare visor: A00665.\_0




Low glare tube visor: A00666.\_0



## SUGGESTED REMOTE DRIVER

**On/off:**  
CC20-F-350-N / CC20-F-700-N



**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CC25-DM-350-N / CC25-DM-700-N



Other options upon request