


Tono i IP67

Recessed Light | IP67 | Class III | Dimmable

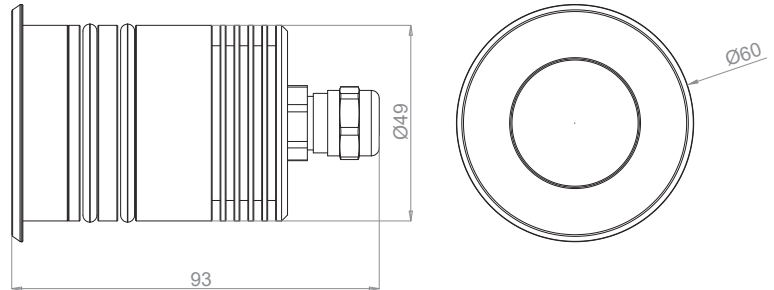

LIGHT SOURCE & OPTIC

Power

3W
6W
7W (24Vdc)

Lens

3°
10°
30°
50°

Beam Direction

Fixed

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80 / CRI>90
3500K CRI>80
4000K CRI>80

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 60mm x H 93mm

Material

Aluminium

Body finishes

Black
Gray
Stainless Steel AISI 316L

Weight

340gr

Mounting

Recessed

Fixing

Wall - Floor Recessed

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
900 mA (3W)
500 mA (6W)
Typical Vf= 3V (3W)
Typical Vf= 12V (6W)
Constant tension:
24Vdc (3W/7W)

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Tono i IP67

PHOTOMETRIC DATA (3000K CRI>80)

3W - 3° | UGR 1.5

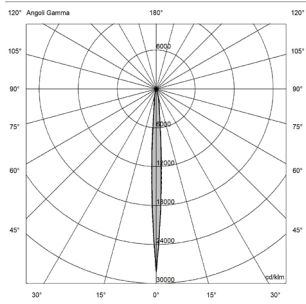


H (m)	D (m)	Eav (lx)
1	0.10	3163
2	0.21	791
3	0.31	351
4	0.42	198
5	0.52	127

Total lumen output
184 lm

Efficacy
61 lm/W
61 lm/W (24Vdc)

6W - 10° | UGR 4

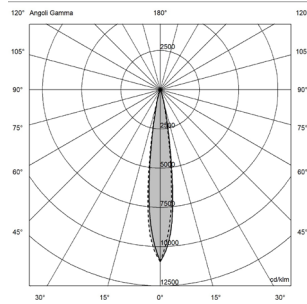


H (m)	D (m)	Eav (lx)
1	0.27	3096
2	0.53	774
3	0.80	344
4	1.07	193
5	1.34	124

Total lumen output
443 lm

Efficacy
74 lm/W
63 lm/W (24Vdc)

6W - 30° | UGR 6.2

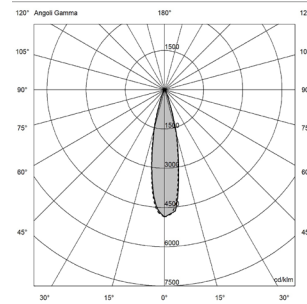


H (m)	D (m)	Eav (lx)
1	0.42	1170
2	0.83	292
3	1.25	130
4	1.67	73
5	2.08	47

Total lumen output
379 lm

Efficacy
63 lm/W
54 lm/W (24Vdc)

6W - 50° | UGR 7.6

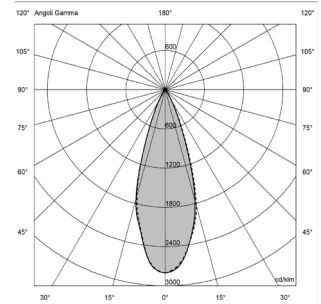

H (m)	D (m)	Eav (lx)
1	0.62	598
2	1.24	150
3	1.87	66
4	2.49	37
5	3.11	24


Total lumen output
353 lm

Efficacy
59 lm/W
50 lm/W (24Vdc)


Tono i IP67

INSTALLATION ACCESSORIES

Alluminium recessed box (A00489.40)





Watertight connector (A00387.40)



SUGGESTED REMOTE DRIVER

On/off:

CC14-F-500-PI / CC14-F-900-PI
CV30-F-24-PI

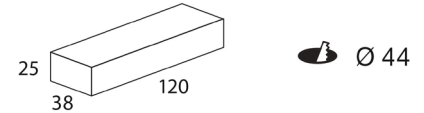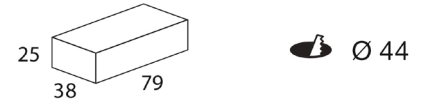

Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-M-500-P / CC10-D-900-PI
CV25-D-24-PI

