


# Tono im IP67

Recessed Light | IP67 | Class III | Dimmable

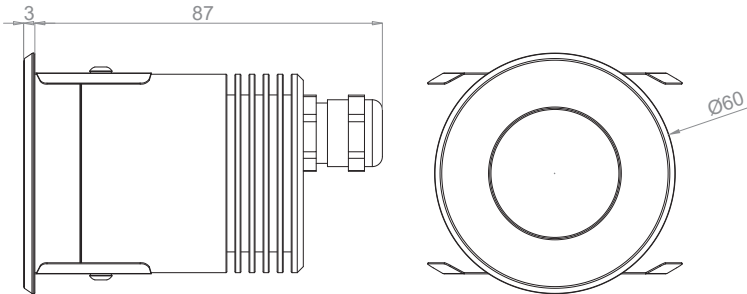

## LIGHT SOURCE & OPTIC

**Power**

3W  
6W  
7W

**Lens**

3°  
10°  
30°  
50°

**Beam Direction**

Fixed

**Material**

PMMA

**LED quantity**

1

**Binning**

2 MacAdam steps

**Color temperature & quality**

2700K  
3000K  
3000K CRI>90  
3500K  
4000K

**Lifetime**

(L90) >55.000 hrs

## FIXTURE

**Dimensions**

Ø 60mm x H 93mm

**Material**

Aluminium

**Body finishes**

Black  
Grey  
White - RAL 9003  
Stainless Steel 361L

**Weight**

325gr

**Mounting**

Recessed

**Fixing**

Wall - Floor Recessed

**Working temperature**

-20° / +40°

## ELECTRICAL FEATURES

**Power supply**

Main Voltage:  
24 Vdc  
500 mA  
900 mA

**Driver requirement**


Remote (not included)

**Control**

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Tono im IP67


## PHOTOMETRIC DATA (3000K CRI>90)



| H<br>(m) | D<br>(m) | Eav<br>(lx) |
|----------|----------|-------------|
| 1        | 0.10     | 5200        |
| 2        | 0.21     | 1300        |
| 3        | 0.31     | 578         |
| 4        | 0.42     | 325         |
| 5        | 0.52     | 208         |

**Total lumen output**  
184 lm


**Efficacy**  
71 lm/W



| H<br>(m) | D<br>(m) | Eav<br>(lx) |
|----------|----------|-------------|
| 1        | 0.27     | 4859        |
| 2        | 0.53     | 1215        |
| 3        | 0.80     | 540         |
| 4        | 1.07     | 304         |
| 5        | 1.34     | 194         |

**Total lumen output**  
443 lm


**Efficacy**  
78 lm/W

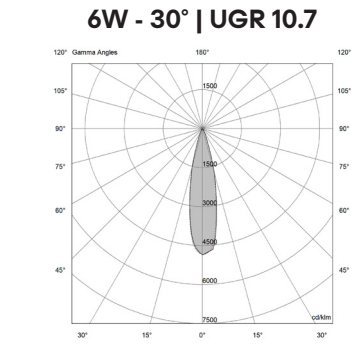

| H<br>(m) | D<br>(m) | Eav<br>(lx) |
|----------|----------|-------------|
| 1        | 0.42     | 1842        |
| 2        | 0.83     | 460         |
| 3        | 1.25     | 205         |
| 4        | 1.67     | 115         |
| 5        | 2.08     | 74          |

**Total lumen output**  
379 lm

**Efficacy**  
65 lm/W

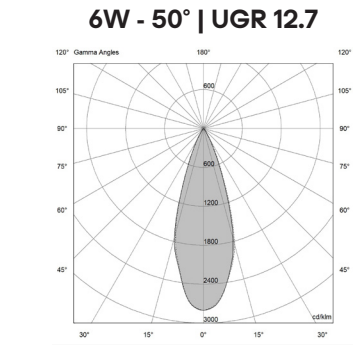


| H<br>(m) | D<br>(m) | Eav<br>(lx) |
|----------|----------|-------------|
| 1        | 0.62     | 989         |
| 2        | 1.24     | 247         |
| 3        | 1.84     | 110         |
| 4        | 2.49     | 62          |
| 5        | 3.11     | 40          |

**Total lumen output**  
352 lm

**Efficacy**  
60 lm/W

# Tono im IP67


## PHOTOMETRIC DATA (3000K CRI>90 - Hex louver)

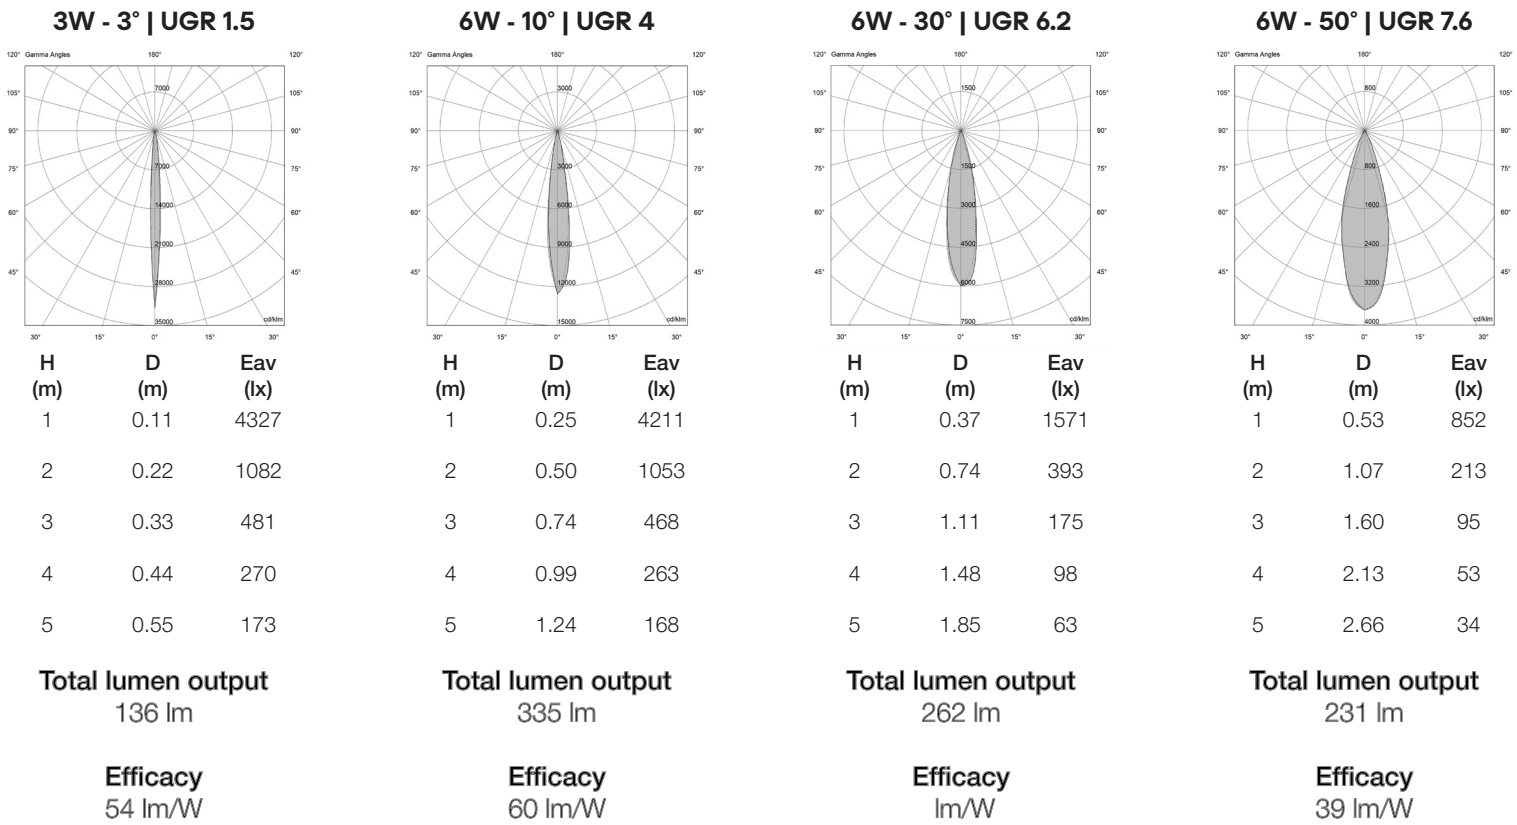

# Tono im IP67

## INSTALLATION ACCESSORIES


Watertight connector (A00387.40)

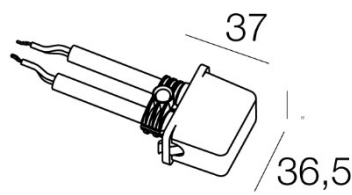

## SUGGESTED REMOTE DRIVER

**On/off:**

CC14-F500-PI / CC14-F900-PI  
CV30-F-24-PI

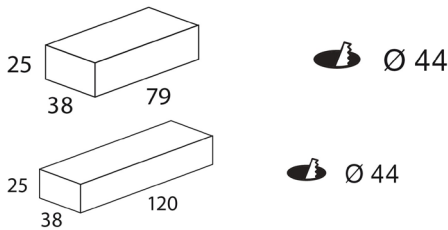

**Multifunction (DALI 2, 0/1-10V, PUSH):**

CC20-M-500-P / CC10-D-900-PI  
CV25-D-24-PI

