


Trium P IP67

Projectors | IP67 | Class III | Dimmable

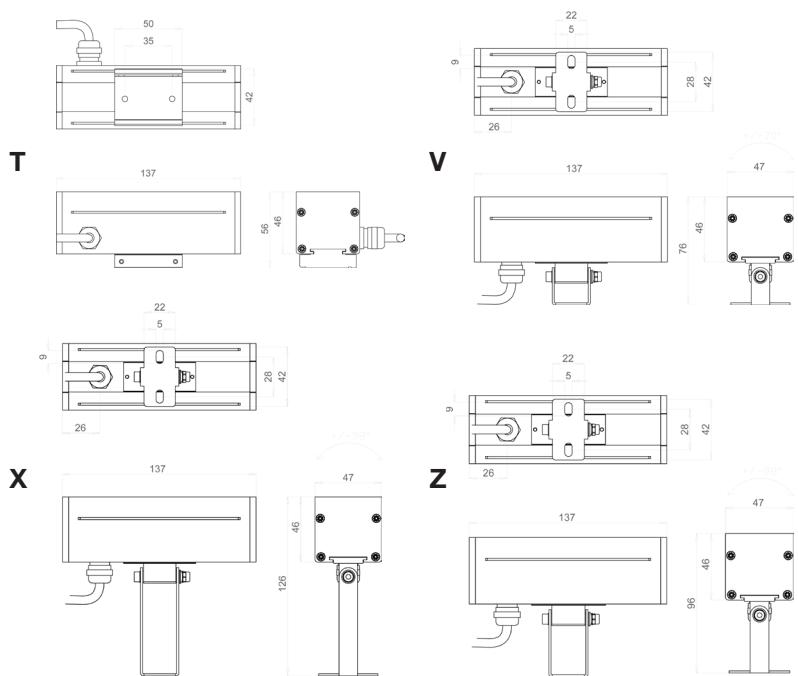

LIGHT SOURCE & OPTIC

Power

7W
15W

Lens

10°
25°
40°
60°
Elliptical Lens
Wall Washer

Beam Direction

Fixed, Symmetrical / Asymmetrical

Material

PMMA + glass

LED quantity

3

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80

Lifetime (25°C)

L80 > 60.000 hrs (7W)
L80 > 60.500 hrs (15W)

FIXTURE

Dimensions

137mm x 47mm x H 46mm

Material

Aluminium
AISI 316L

Body finishes

Brushed Stainless Steel
AISI 316L

Weight

530gr

Mounting

On surface

Fixing

Fixing plate
Adjustable bracket H30
Adjustable bracket H50
Adjustable bracket H80

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension:
24Vdc (7/15W)
Constant current:
700mA (RGBW-7W)

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Trium P IP67

PHOTOMETRIC DATA (3000K CRI>80)


7W - 10° | UGR 12




7W - 25° | UGR 13



7W - 40° | UGR 16



7W - 60° | UGR 20



H (m)	D (m)	Eav (lx)
1	0.21	5237
2	0.42	1309
3	0.63	582
4	0.84	327
5	1.05	209

H (m)	D (m)	Eav (lx)
1	0.52	1516
2	1.03	379
3	1.55	168
4	2.07	95
5	2.59	61

H (m)	D (m)	Eav (lx)
1	0.65	715
2	1.31	179
3	1.96	79
4	2.61	45
5	3.27	29

H (m)	D (m)	Eav (lx)
1	1.32	263
2	2.64	66
3	3.97	29
4	5.29	16
5	6.61	11

Total lumen output
606 lm

Total lumen output
595 lm

Total lumen output
529 lm

Total lumen output
570 lm


Efficacy
93 lm/W

Efficacy
87 lm/W

Efficacy
76 lm/W


Efficacy
81 lm/W

7W - Elliptical Lens | UGR 16



H (m)	D (m)	Eav (lx)
1	0.80-0.12	712
2	1.16-0.25	178
3	2.40-0.37	79
4	3.20-0.49	45
5	4.00-0.61	28

7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.36-4.51	100
2	0.72-9.02	25
3	1.08-13.53	11
4	1.44-18.04	6
5	1.80-22.55	4

Total lumen output
577 lm

Total lumen output
519 lm


Efficacy
84 lm/W

Efficacy
74 lm/W

Triuum P IP67


PHOTOMETRIC DATA (3000K CRI>80)

15W - 10° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.23	7552
2	0.46	1888
3	0.68	839
4	0.91	472
5	1.14	302

15W - 25° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.52	2621
2	1.04	655
3	1.56	291
4	2.09	164
5	2.61	105

15W - 40° | UGR 18



H (m)	D (m)	Eav (lx)
1	0.63	1297
2	1.26	324
3	1.89	144
4	2.52	81
5	3.15	52

15W - 60° | UGR 21



H (m)	D (m)	Eav (lx)
1	1.28-1.16	496
2	2.56-2.32	124
3	3.84-3.48	55
4	5.12-4.64	31
5	6.40-5.80	20

Total lumen output
1030 lm

Efficacy
73 lm/W

Total lumen output
1048 lm

Efficacy
71 lm/W


Total lumen output
928 lm

Efficacy
62 lm/W

Total lumen output
1015 lm

Efficacy
68 lm/W

15W - Elliptical Lens | UGR 18



H (m)	D (m)	Eav (lx)
1	0.80-0.16	3436
2	1.60-0.32	859
3	2.39-0.47	382
4	3.19-0.63	215
5	3.99-0.79	137


Total lumen output
1006 lm

Efficacy
68 lm/W


Trium P IP67

PHOTOMETRIC DATA (RGBW-white)


7W - 10° | UGR 13




7W - 25° | UGR 13



7W - 40° | UGR 16



7W - 60° | UGR 20



H (m)	D (m)	Eav (lx)
1	0.25	4112
2	0.50	1028
3	0.75	457
4	1.00	257
5	1.26	164

Total lumen output
573 lm

Efficacy
87 lm/W

H (m)	D (m)	Eav (lx)
1	0.53	1339
2	1.06	335
3	1.59	149
4	2.12	84
5	2.65	54

Total lumen output
558 lm

Efficacy
81 lm/W

H (m)	D (m)	Eav (lx)
1	0.56	763
2	1.12	191
3	1.68	85
4	2.23	48
5	2.79	31

Total lumen output
487 lm


Efficacy
70 lm/W

H (m)	D (m)	Eav (lx)
1	0.97	358
2	1.93	90
3	2.90	40
4	3.86	22
5	4.83	14

Total lumen output
537 lm

Efficacy
77 lm/W

7W - Elliptical Lens | UGR 16




H (m)	D (m)	Eav (lx)
1	0.82-0.19	1725
2	1.65-0.39	431
3	2.47-0.58	192
4	3.30-0.78	108
5	4.12-0.97	69

Total lumen output
535 lm

Efficacy
78 lm/W

7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.57-4.66	71
2	1.14-9.32	18
3	1.70-13.93	8
4	2.27-18.64	4
5	2.84-23.31	3

Total lumen output
431 lm

Efficacy
61 lm/W

Triuum P IP67


ACCESSORIES

Optical Filters

Louver
Asy Louver


Low glare visor for T fixing

A01705.40




Low glare visor for V-Z fixing

A01603.40




INSTALLATION ACCESSORIES

Watertight connector: A00357.40




RGBW Watertight connector: A01651.40



SUGGESTED REMOTE DRIVERS

On/Off:


CV30-F-24-PI



● Ø 44

Dimmable (DALI 2):


CV25-D-24-PI



● Ø 60

RGBW:

CC50-X-700-NL



● Ø 84

Other options upon request