


# Trium P IP67

**Projectors | IP67 | Class III | Dimmable**

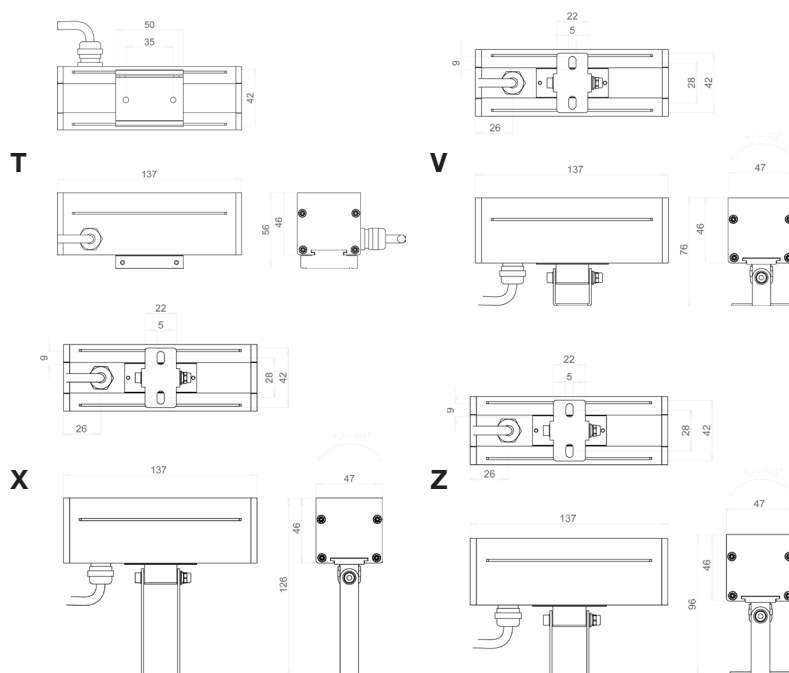

## LIGHT SOURCE & OPTIC

## Power

7W  
15W

## Lens

10°  
25°  
40°  
60°  
Elliptical Lens  
Wall Washer

### Beam Direction

Fixed, Symmetrical

## Material

PMMA

### LED quantity

3

## Binning

2 MacAdam step

### Color temperature & quality

2200K CRI>80  
2700K CRI>80  
3000K CRI>80  
3000K CRI>90  
3500K CRI>80  
4000K CRI>80

## Lifetime

(L70) >36.000 hrs

## FIXTURE

## Dimensions

137mm x 47mm x H 46mm

## Material

Aluminium  
AISI 316L

## Body finishes

Brushed Stainless Steel  
AISI 316L

## Weight

530gr

## Mounting

Surface

## Fixing

Fixing plate  
Adjustable bracket H30  
Adjustable bracket H50  
Adjustable bracket H80

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

## Power supply

Constant current:  
24Vdc  
700mA (RGBW)  
Typical  $V_f = 24V$

### Driver requirement

Remote (not included)


### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

# Trium P IP67

## PHOTOMETRIC DATA (3000K CRI>80)

### 7W - 10° | UGR 12




H (m)	D (m)	Eav (lx)
1	0.21	5237
2	0.42	1309
3	0.63	582
4	0.84	327
5	1.05	209

**Total lumen output**  
606 lm

**Efficacy**  
93 lm/W

### 7W - 25° | UGR 13

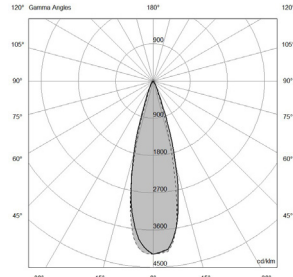


H (m)	D (m)	Eav (lx)
1	0.52	1516
2	1.03	379
3	1.55	168
4	2.07	95
5	2.59	61

**Total lumen output**  
595 lm

**Efficacy**  
87 lm/W

### 7W - 40° | UGR 16

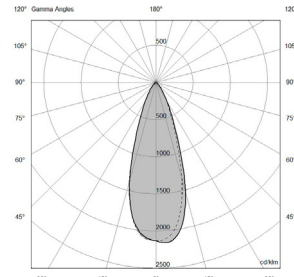


H (m)	D (m)	Eav (lx)
1	0.65	715
2	1.31	179
3	1.96	79
4	2.61	45
5	3.27	29

**Total lumen output**  
529 lm

**Efficacy**  
76 lm/W

### 7W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	1.32	263
2	2.64	66
3	3.97	29
4	5.29	16
5	6.61	11

**Total lumen output**  
570lm

**Efficacy**  
81 lm/W

### 7W - Elliptical Lens | UGR 16

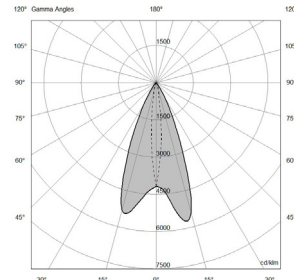


H (m)	D (m)	Eav (lx)
1	0.80-0.12	712
2	1.16-0.25	178
3	2.40-0.37	79
4	3.20-0.49	45
5	4.00-0.61	28

**Total lumen output**  
577 lm

**Efficacy**  
84 lm/W

### 7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.36-4.51	100
2	0.72-9.02	25
3	1.08-13.53	11
4	1.44-18.04	6
5	1.80-22.55	4


**Total lumen output**  
519 lm

**Efficacy**  
74 lm/W

# Trium P IP67

## PHOTOMETRIC DATA (3000K CRI>80)

### 15W - 10° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.23	7552
2	0.46	1888
3	0.68	839
4	0.91	472
5	1.14	302

**Total lumen output**  
1030 lm

**Efficacy**  
73 lm/W

### 15W - 25° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.52	2621
2	1.04	655
3	1.56	291
4	2.09	164
5	2.61	105

**Total lumen output**  
1048 lm

**Efficacy**  
71 lm/W

### 15W - 40° | UGR 18




H (m)	D (m)	Eav (lx)
1	0.63	1297
2	1.26	324
3	1.89	144
4	2.52	81
5	3.15	52

**Total lumen output**  
928 lm

**Efficacy**  
62 lm/W

### 15W - 60° | UGR 21




H (m)	D (m)	Eav (lx)
1	1.28-1.16	496
2	2.56-2.32	124
3	3.84-3.48	55
4	5.12-4.64	31
5	6.40-5.80	20

**Total lumen output**  
1015 lm

**Efficacy**  
68 lm/W

### 15W - Elliptical Lens | UGR 18



H (m)	D (m)	Eav (lx)
1	0.80-0.16	3436
2	1.60-0.32	859
3	2.39-0.47	382
4	3.19-0.63	215
5	3.99-0.79	137


**Total lumen output**  
1006 lm

**Efficacy**  
68 lm/W

# Trium P IP67

## PHOTOMETRIC DATA (RGBW-white)

### 7W - 10° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.25	4112
2	0.50	1028
3	0.75	457
4	1.00	257
5	1.26	164

**Total lumen output**  
573 lm

**Efficacy**  
87 lm/W

### 7W - 25° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.53	1339
2	1.06	335
3	1.59	149
4	2.12	84
5	2.65	54

**Total lumen output**  
558 lm

**Efficacy**  
81 lm/W

### 7W - 40° | UGR 16

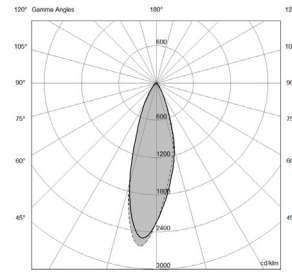


H (m)	D (m)	Eav (lx)
1	0.56	763
2	1.12	191
3	1.68	85
4	2.23	48
5	2.79	31

**Total lumen output**  
487 lm

**Efficacy**  
70 lm/W

### 7W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.97	358
2	1.93	90
3	2.90	40
4	3.86	22
5	4.83	14

**Total lumen output**  
537 lm

**Efficacy**  
77 lm/W

### 7W - Elliptical Lens | UGR 16

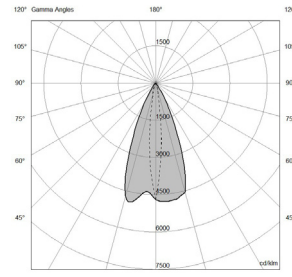


H (m)	D (m)	Eav (lx)
1	0.82-0.19	1725
2	1.65-0.39	431
3	2.47-0.58	192
4	3.30-0.78	108
5	4.12-0.97	69

**Total lumen output**  
535 lm

**Efficacy**  
78 lm/W

### 7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.57-4.66	71
2	1.14-9.32	18
3	1.70-13.93	8
4	2.27-18.64	4
5	2.84-23.31	3

**Total lumen output**  
431 lm

**Efficacy**  
61 lm/W

# Triuum P IP67


## ACCESSORIES

### Optical Filters

- Louver
- Asy Louver


### Low glare visor for T fixing

A01705.40



### Low glare visor for V-Z fixing


A01603.40



## SUGGESTED REMOTE DRIVERS

### On/Off:


CV30-F-24-PI



Ø 44

### Dimmable (DALI 2):


CV25-D-24-PI



Ø 60

### RGBW:

CC50-X-700-NL



Ø 84

Other options upon request