


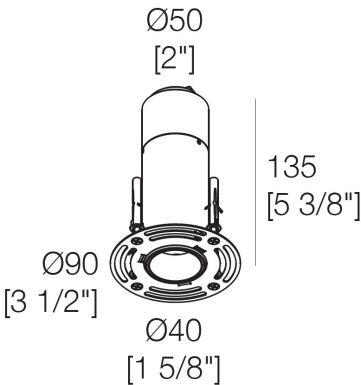

LIGHT SOURCE & OPTIC

- Power**
9W
- Lens**
14° - not interchangeable
18°/ 24°/ 33°/ 52° - interchangeable
- Beam Direction**
Fixed, Symmetrical
- Material**
PMMA
- LED quantity**
1

- Binning**
2 MacAdam steps

- Color temperature & quality**
2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

- Lifetime**
(L70) >77.000 hrs

FIXTURE


- Dimensions**
Ø 3 1/2" x H 5 3/8"
- Material**
Aluminium
- Body finishes**
Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)
- Decorative ring finishes**
Gold Chrome
Shiny Chrome
Satin Gold
Satin Nickel
Black
- Weight**
300gr (0,66 lbs)
- Mounting**
Recessed: cut out Ø 50mm (2")
- Fixing**
Fixing frame for flush mounting
- Working temperature**
-20° / +40°

ELECTRICAL FEATURES

- Power supply**
Constant current:
500 mA
Typical Vf= 18V
- Driver requirement**
Remote (not included)
- Control**
On/off
Push switch
Phase Cut
0/1-10 V
DALI

PHOTOMETRIC DATA (3000K CRI>90)

9W - 18° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.32	3087
2	0.64	772
3	0.96	343
4	1.28	193
5	1.60	123

Total lumen output
712 lm

Efficacy
79 lm/W

9W - 24° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.41	1919
2	0.83	480
3	1.24	213
4	1.66	120
5	2.07	77

Total lumen output
685 lm

Efficacy
76 lm/W

9W - 33° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.60	980
2	1.21	245
3	1.81	109
4	2.41	61
5	3.02	39

Total lumen output
618 lm

Efficacy
69 lm/W

9W - 52° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.97	550
2	1.94	138
3	2.91	61
4	3.88	34
5	4.85	22

Total lumen output
682 lm

Efficacy
76 lm/W

9W - 14° | UGR 10



H (m)	D (m)	Eav (lx)
1	0.25	4298
2	0.50	1074
3	0.76	478
4	1.01	269
5	1.26	172

Total lumen output
659 lm

Efficacy
73 lm/W

INTERCHANGEABLE ACCESSORIES

Optical Filters

- Hex louver
- Elliptical Filter
- Prismatic filter
- Softening lens

Lenses

18° / 24° / 33° / 52°

Filter holder rings


- Black
- Gold Chrome
- Satin Gold
- Satin Nickel
- Shiny Chrome

INSTALLATION ACCESSORIES


Fixing rame (A01538.40)
Necessary element: please specify always 1
frame for each Fixture in the purchase order

SUGGESTED REMOTE DRIVERS

0/1..10V:
CC36-R-500-NF



DALI 2, PUSH:
CC30-D-500-NL



Other options upon request