

Ariel B Micro Plug&play

Low Voltage Track Projectors

● Plug&Play System

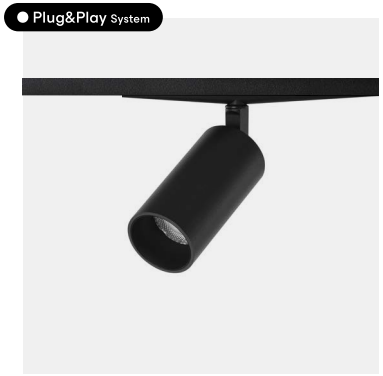

IP40 | 24V 48V | 220 g | P&P | SD CM 2 | TM 66 2,6



Ariel B Micro Plug&Play

24-48Vdc Lumen Output 3000K	10W 24-48Vdc - 900 lm	12W 24-48Vdc - 1100 lm
14° Lens	7Q4809._ _ _ _ _	7Q4810._ _ _ _ _
18° Lens	784809._ _ _ _ _	784810._ _ _ _ _
24° Lens	7G4809._ _ _ _ _	7G4810._ _ _ _ _
33° Lens	7E4809._ _ _ _ _	7E4810._ _ _ _ _
52° Lens	754809._ _ _ _ _	754810._ _ _ _ _

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

DIMMING

- F ON-OFF
- D DALI
- M Broadcast (24Vdc only)

discover more

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 707
48Vdc	CV150-F-48-N	p. 709

TRACKS ACCESSORIES

Micro track and accessories p. 684

INTERCHANGEABLE ACCESSORIES



p. 676

EXAMPLE CODE COMPOSITION

123456._ _ _ _ _ _

- DIMMING
- OPTICAL FILTER
- DECORATIVE RING
- CCT
- FINISH