

Ariel B Micro dim to warm

Low voltage track projectors | IP40 | Class III | Dimmable





Module



+

Interchangeable accessories



LIGHT SOURCE & OPTIC

Power

10W
12W

Lens

14° - not interchangeable
18°/ 24°/ 33°/ 52° - interchangeable

Beam Direction

Adjustable:
Tilting +/- 90°, Rotating +/- 355°,
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

1800K-3000K CRI>90

Lifetime

L80 B50 >88.000 hrs

Output

3000K CRI>90: 918 lm

FIXTURE

Dimensions

Ø 40mm x H 78mm (cylinder)

Material

Aluminium

Module finishes

Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)

Filter holder finishes

Gold Chrome
Shiny Chrome
Satin Gold
Satin Nickel
Black

Weight

150gr

Mounting

On Track

Fixing

Track connector

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 48 Vdc

48 Vdc Vf= 18V

Typical Vf= 18V

Driver

Driver (not included)

Remote (not included)

Control



Control

DALI

Broadcast

Ariel B Micro dim to warm

PHOTOMETRIC DATA (DIM TO WARM 3000K CRI>90)

10W - 33° UGR 19			10W - 52° UGR 22		
					
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.61	806	1	1.12	383
2	1.22	202	2	2.24	96
3	1.83	90	3	3.36	43
4	2.44	50	4	4.49	24
5	3.05	32	5	5.61	15
Total lumen output 575 lm			Total lumen output 629 lm		
Efficacy 57 lm/W			Efficacy 63 lm/W		

Ariel B Micro dim to warm

INTERCHANGEABLE ACCESSORIES

Optical Filters

Hex louver
Elliptical Filter
Prismatic filter
Softening lens

Lenses

33°/ 52°


Decorative rings

Black
Gold Chrome
Satin Gold
Satin Nickel
Shiny Chrome

INSTALLATION ACCESSORIES

Compatible with 48Vdc Micro Track:

Standard track (A00918._0)

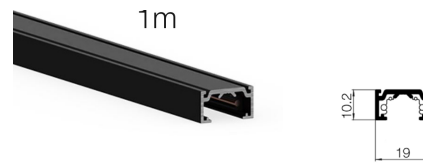

Trimless track (A01064._0)




Suspended track (A01664._0)



SUGGESTED REMOTE DRIVERS

On/Off :

CV70-F-48-N



Please consider 1 address for each DALI projector.