

Ariel P IP67

Projectors



[1] 14° Lens not interchangeable

IP67

WIPS

500
600

24V

2 m


400 g

2

2,6

P&P

2,7

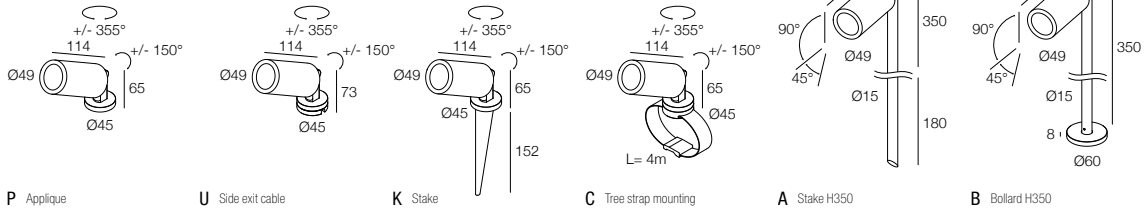

Ariel P IP67

	500 / 600mA Lumen Output 3000K	9W 500mA - 770 lm	11W 600mA - 1000 lm
	14° Lens [1]	7Q4551. _ _ _ _ _	7Q5000. _ _ _ _ _
	18° Lens	784551. _ _ _ _ _	785000. _ _ _ _ _
	24° Lens	7G4551. _ _ _ _ _	7G5000. _ _ _ _ _
	33° Lens	7E4551. _ _ _ _ _	7E5000. _ _ _ _ _
	52° Lens	754551. _ _ _ _ _	755000. _ _ _ _ _
	24V Lumen Output 3000K	9,5W 24Vdc - 770 lm	12W 24Vdc - 1000 lm
	14° Lens [1]	7Q4718. _ _ _ _ _	7Q5001. _ _ _ _ _
	18° Lens	784718. _ _ _ _ _	785001. _ _ _ _ _
	24° Lens	7G4718. _ _ _ _ _	7G5001. _ _ _ _ _
	33° Lens	7E4718. _ _ _ _ _	7E5001. _ _ _ _ _
	52° Lens	754718. _ _ _ _ _	755001. _ _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			



SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI
600mA	CC20-F-600-PI
24Vdc	CV30-F-24-PI

INTERCHANGEABLE ACCESSORIES

Low glare visor
A00519_0

Low glare snoot
A00848_0

Watertight connector
A00387.40

EXAMPLE CODE COMPOSITION

