




# ARMONIA

- IP40
- Class III
- Montaggio a pavimento  
Floor mounting
- Luce continua  
Dotless
- Collegare in parallelo 24Vdc  
Connect in parallel at 24Vdc
- 350 gr/m
- Ø 6 mm
- Altamente riciclabile  
Highly recyclable
- UL LISTED

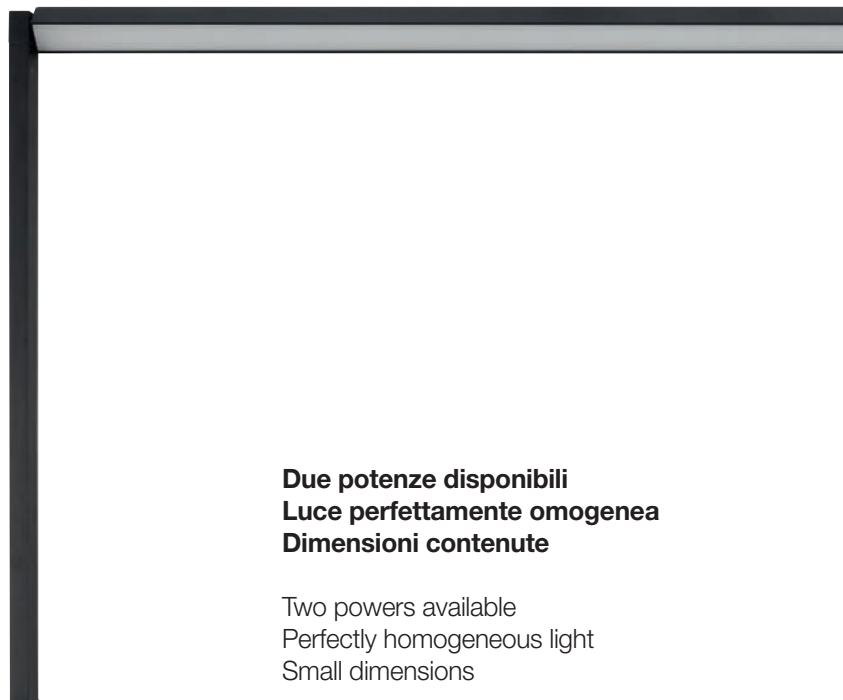


**Due potenze disponibili**  
**Luce perfettamente omogenea**  
**Dimensioni contenute**

Two powers available  
Perfectly homogeneous light  
Small dimensions


## ARMONIA OPAL COVER

	12W/m 24Vdc	25W/m 24Vdc	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	700lm/m	1300lm/m		
			3 Grigio - Gray 4 Nero - Black	U 2200K Q 2500K X 2700K CRI > 90 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 1 5000K
Copertura opalina Opal cover	AP125-_____-UL	AP225-_____-UL		

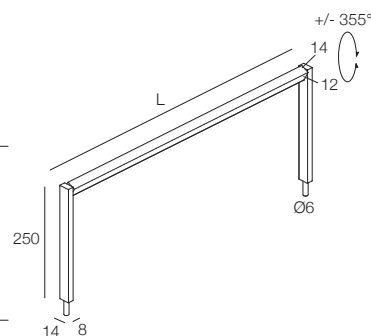

## ARMONIA LINEAR LENS

	12W/m 24Vdc	25W/m 24Vdc	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	950lm/m	1700lm/m		
			3 Grigio - Gray 4 Nero - Black	U 2200K Q 2500K X 2700K CRI > 90 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 1 5000K
40° Linear Lens	AI125-_____-UL	AI225-_____-UL		

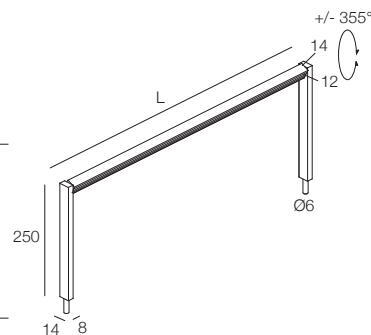

Lunghezze ottimizzate (cm)  
Optimized lengths (cm)

031 034 037 040 043 046 049 052 055 058 061 064 067 070 073 076 079 082 085 088 091 094 097 100 103 106  
109 112 115 118

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

24Vdc CV100-F-24-NE

EXAMPLE CODE COMPOSITION  
12345-\_\_\_\_\_-UL  
Length in cm  
9 cm step  
min 031 - max 118  
LED COLOUR  
FINISH