


Armonia curva Linear lens

Linear System | IP40 | Class III | Dimmable

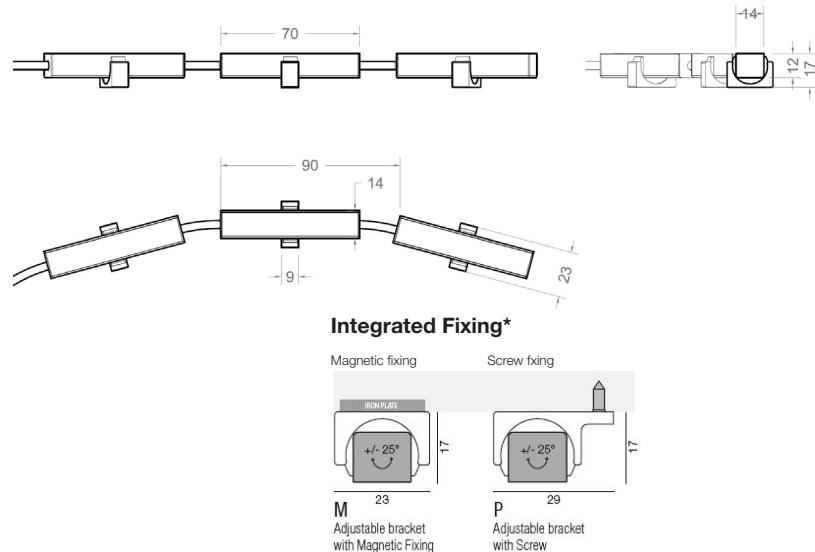

LIGHT SOURCE & OPTIC

Power

15W/m

Lens

Transparent Cover, (6%)
Opal Cover (25%)
Black Ghost Cover (80%)

Beam Direction

Fixed, Symmetrical

Material

PMM

LED quantity

179

Binning

2 MacAdam step

Color temperature & quality

2200K

2500K

2700K CRI>90

3000K CRI>90

3500K CRI>90

4000K CRI>90

Lifetime

L85 >95.000 hrs

Fixture

Dimensions

D 23-29mm x H 17mm x L:

007 016 025 034 052 070 079 088 097 106
115 124 133 142

Material

Aluminum

Body finishes

Black
Gray

Weight

220gr/m

Mounting

On surface

End caps

Aluminum

Fixing*

Adjustable bracket with Magnetic Fixing

Adjustable bracket with Screw

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 12 Vdc

Driver

Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Cable exit


In&Out cap exit



Armonia curva Linear lens

PHOTOMETRIC DATA (3000K CRI>90-Linear lens-L.70 mm)

2W - 40x80° | UGR 29



H (m)	D (m)	Eav (lx)
1	0.73-1.59	43
2	1.45-3.18	11
3	2.18-4.77	5
4	2.90-6.36	3
5	3.63-7.96	2

Total lumen output

95 lm

Efficacy

47 lm/W

Armonia curva Linear lens

INSTALLATION ACCESSORIES

Iron plate

Only for Armonia with magnetic fixing




Iron plate for M Magnetic Fixing

A01747.H0

SUGGESTED REMOTE DRIVERS

On/Off :

CV70-F-12-N



Other options upon request