



# Armonia Louver dimmable

Linear System | IP40 | Class III | Dimmable

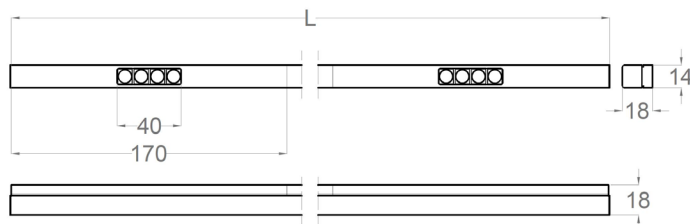

### Integrated Fixing\*

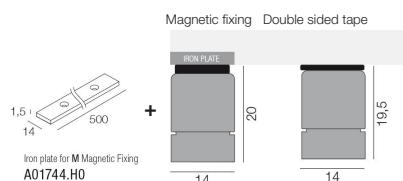

## LIGHT SOURCE & OPTIC

**Power**  
36W/m

**Lens**  
10°  
30°  
40°  
60°  
Elliptical

**Beam Direction**  
Fixed, Asymmetrical

**Material**  
PMM

**LED quantity**  
24 LED/m

**Binning**  
2 MacAdam step

### Color temperature & quality

2200K CRI>80  
2500K CRI>80  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

### Lifetime (Ta 25°)

L80 >76.700 hrs

## FIXTURE

**Dimensions**  
L 14mm x H 18mm x L(cm):

017 034 051 068 085 102 119 136 153 170  
187 204 221 238 255 270 289

**Material**  
Aluminum

**Body finishes**  
Black  
Gray

**Weight**  
415gr/m

**Mounting**  
On surface

**End caps**  
Aluminum

**Fixing\***  
Magnetic fixing  
Double sided tape  
Without fixing (see accessories)

**Working temperature**  
-20° / +40°

## ELECTRICAL FEATURES

**Power supply**  
Constant tension: 24 Vdc

**Driver**  
Remote (not included)

**Control**  
On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

**Cable exit**  
Cap exit

In&Out cap exit

Left side exit

In&Out side exit

Right side exit

Back exit


Back in&out exit



# Armonia Louver dimmable

## PHOTOMETRIC DATA (3000K CRI>90-single module L 17cm)

### 6W - 10° | UGR 3

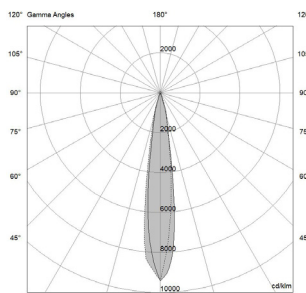


H (m)	D (m)	Eav (lx)
1	0.28	1392
2	0.56	348
3	0.84	155
4	1.12	87
5	1.40	56

**Total lumen output**  
224 lm

**Efficacy**  
37 lm/W

### 6W - 30° | UGR 11

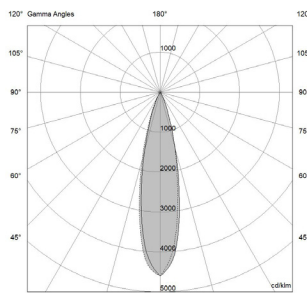


H (m)	D (m)	Eav (lx)
1	0.41	563
2	0.83	141
3	1.24	63
4	1.66	35
5	2.07	23

**Total lumen output**  
192 lm

**Efficacy**  
32 lm/W

### 6W - 40° | UGR 18

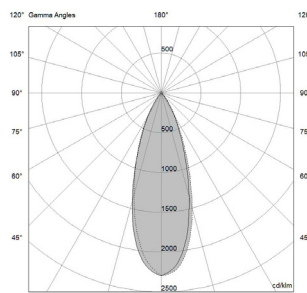


H (m)	D (m)	Eav (lx)
1	0.64	292
2	1.28	73
3	1.92	32
4	2.55	18
5	3.19	12

**Total lumen output**  
208 lm

**Efficacy**  
35 lm/W

### 6W - 60° | UGR 20

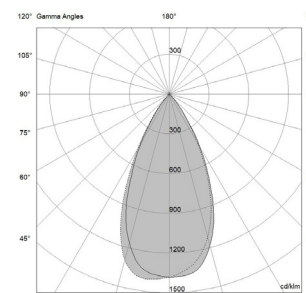


H (m)	D (m)	Eav (lx)
1	0.95	159
2	1.90	40
3	2.84	18
4	3.79	10
5	4.74	6

**Total lumen output**  
195 lm

**Efficacy**  
32 lm/W

### 6W - 20x40° | UGR 9-11

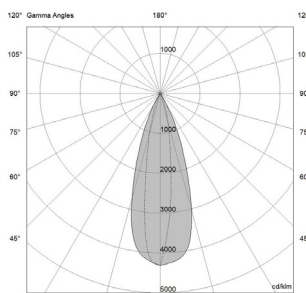

H (m)	D (m)	Eav (lx)
1	0.29-0.65	550
2	0.58-1.30	137
3	0.87-1.95	61
4	1.16-2.60	34
5	1.45-3.25	22

**Total lumen output**  
192 lm


**Efficacy**  
32 lm/W

# Armonia Louver dimmable


## INSTALLATION ACCESSORIES

### Magnetic brackets

Only for Armonia without fixing




Iron plate



### Brackets with screws


Only for Armonia without fixing



## SUGGESTED REMOTE DRIVERS


### On/Off :

CV70-F-24-N



### Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI

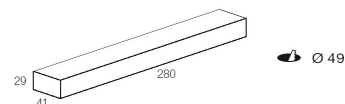

Other options upon request