



# Armonia Louver

Linear System | IP40 | Class III | Not dimmable

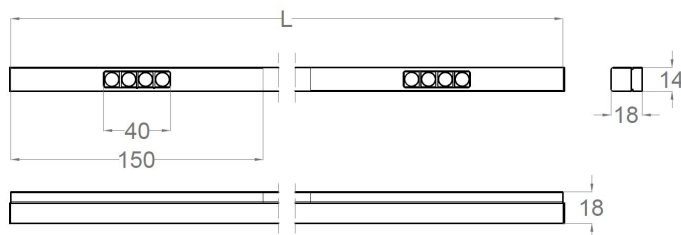

### Integrated Fixing\*

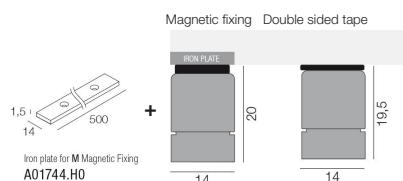

## LIGHT SOURCE & OPTIC

**Power**  
26W/m

**Lens**  
10°  
30°  
40°  
60°  
Elliptical

**Beam Direction**  
Fixed, Asymmetrical

**Material**  
PMM

**LED quantity**  
24 LED/m

**Binning**  
2 MacAdam step

### Color temperature & quality

2200K CRI>80  
2500K CRI>80  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

### Lifetime (Ta 25°)

L<sub>80</sub> >76.700 hrs

## FIXTURE

**Dimensions**  
L 14mm x H 18mm x L(cm):

015 030 045 060 075 090 105 120 135 150  
165 180 195 210 225 240 255 270 285 300

**Material**  
Aluminum

**Body finishes**  
Black  
Gray

**Weight**  
415gr/m

**Mounting**  
On surface

**End caps**  
Aluminum

**Fixing\***  
Magnetic fixing  
Double sided tape  
Without fixing (see accessories)

**Working temperature**  
-20° / +40°

## ELECTRICAL FEATURES

**Power supply**  
Constant tension: 24 Vdc

**Driver**  
Remote (not included)

**Control**  
On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

**Cable exit**  
Cap exit

In&Out cap exit

Left side exit

In&Out side exit

Right side exit

Back exit


Back in&out exit



# Armonia Louver

## PHOTOMETRIC DATA (3000K CRI>90-single module L 15cm)

### 4W - 10° | UGR 3

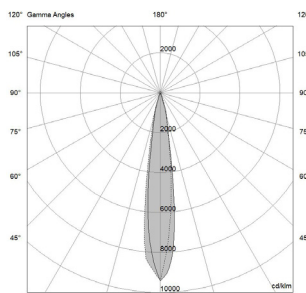


H (m)	D (m)	Eav (lx)
1	0.27	1901
2	0.54	475
3	0.81	211
4	1.08	119
5	1.35	76

**Total lumen output**  
310 lm

**Efficacy**  
78 lm/W

### 4W - 30° | UGR 11

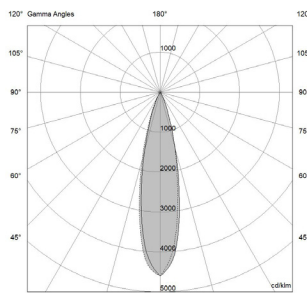


H (m)	D (m)	Eav (lx)
1	0.41	773
2	0.83	193
3	1.24	86
4	1.66	48
5	2.07	31

**Total lumen output**  
266 lm

**Efficacy**  
66 lm/W

### 4W - 40° | UGR 18

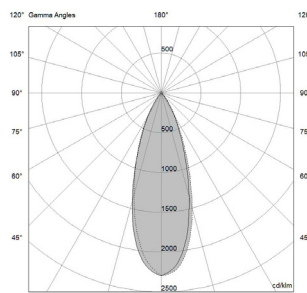


H (m)	D (m)	Eav (lx)
1	0.63	404
2	1.25	101
3	1.88	45
4	2.50	25
5	3.13	16

**Total lumen output**  
288 lm

**Efficacy**  
72 lm/W

### 4W - 60° | UGR 20

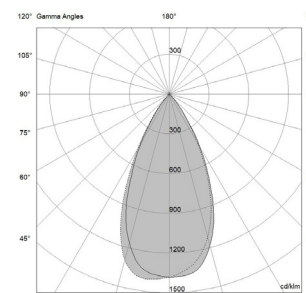


H (m)	D (m)	Eav (lx)
1	0.94	218
2	1.87	55
3	2.81	24
4	3.74	14
5	4.68	9

**Total lumen output**  
264 lm

**Efficacy**  
66 lm/W

### 4W - 20x40° | UGR 4-12

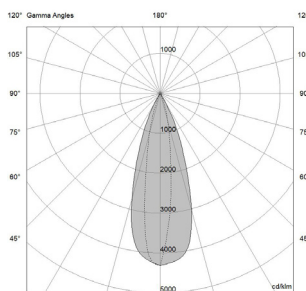

H (m)	D (m)	Eav (lx)
1	0.30-0.65	747
2	0.60-1.30	187
3	0.90-1.95	83
4	1.21-2.60	47
5	1.51-3.25	30

**Total lumen output**  
264 lm


**Efficacy**  
66 lm/W

# Armonia Louver


## INSTALLATION ACCESSORIES

### Magnetic brackets

Only for Armonia without fixing




### Iron plate



### Brackets with screws


Only for Armonia without fixing



## SUGGESTED REMOTE DRIVERS

### On/Off :

CV70-F-24-N



Other options upon request