


Aurora Zoom 3000 F

Track and surface zoom projectors | IP40 | Class II | Dimmable

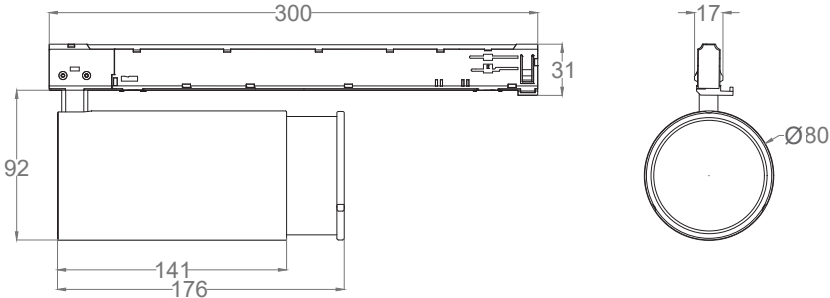

LIGHT SOURCE & OPTIC

- Power**
30W
- Lens**
Zoom 8°>45°
- Beam Direction**
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

- Material**
Glass

- LED quantity**
1

- Binning**
2 MacAdam steps

- Color temperature & quality**
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

- Lifetime**
(L90) >60.000 hrs

FIXTURE

- Dimensions**
Ø 80mm x H 176 mm (cylinder)
- Material**
Aluminium
- Body finishes**
Black (RAL 9005)
White (RAL 9003)
All White (RAL 9003)

- Weight**
1050gr

- Mounting**
On Track

- Fixing**
Track Connector


- Working temperature**
-20° / +40°

ELECTRICAL FEATURES

- Power supply**
Main Voltage: 220-240Vac
Typical Vf= 36V
- Driver requirement**
Built-in driver
- Control**
On/off
DALI

Aurora Zoom 3000 F

PHOTOMETRIC DATA (3000K CRI>80)

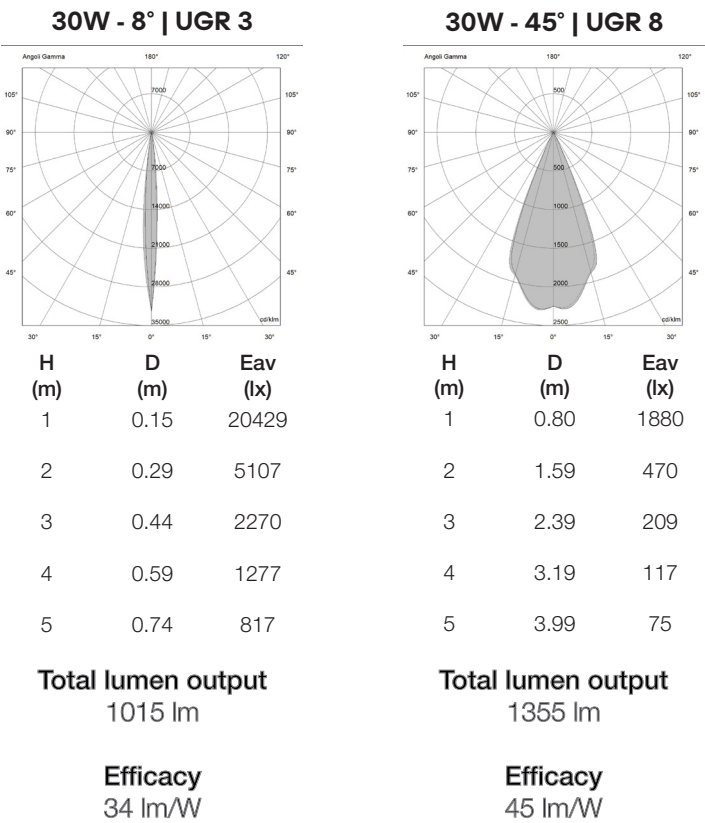

Aurora Zoom 3000 F

INSTALLATION ACCESSORIES

Compatible with 230Vac Track:

Surface and suspended track (A01668._0)
1m

