
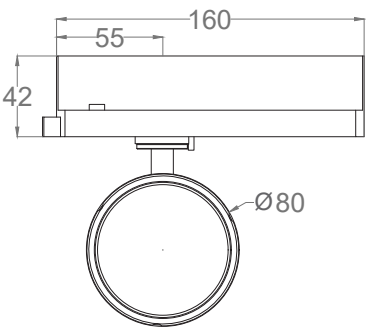


Aurora Zoom 3000

Track and surface zoom projectors | IP40 | Class II | On/off-immable

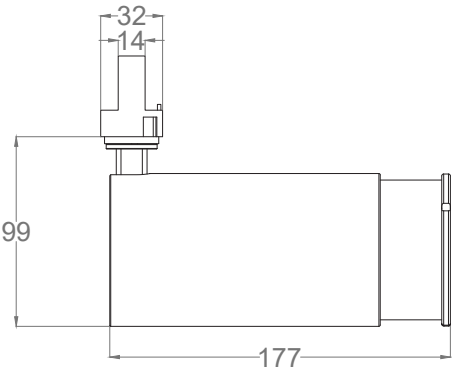

LIGHT SOURCE & OPTIC

- Power**
30W
- Optic**
Zoom lens 8°>45°
- Beam Direction**
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material
Glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime (Ta 25°)
L70 >77.000 hrs

Output (3000K CRI>90)
2012 lm

FIXTURE

Dimensions
Ø 80mm x H 176 mm (cylinder)

Material
Aluminium

Body finishes
Black (RAL 9005)
White (RAL 9003)
All White (RAL 9003)

Weight
1050gr

Mounting
On Track

Fixing
Track Connector

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage: 220-240Vac
Typical Vf= 36V

Driver requirement
Built-in driver

Control
On/off
DALI

Aurora Zoom 3000

PHOTOMETRIC DATA (3000K CRI>80)

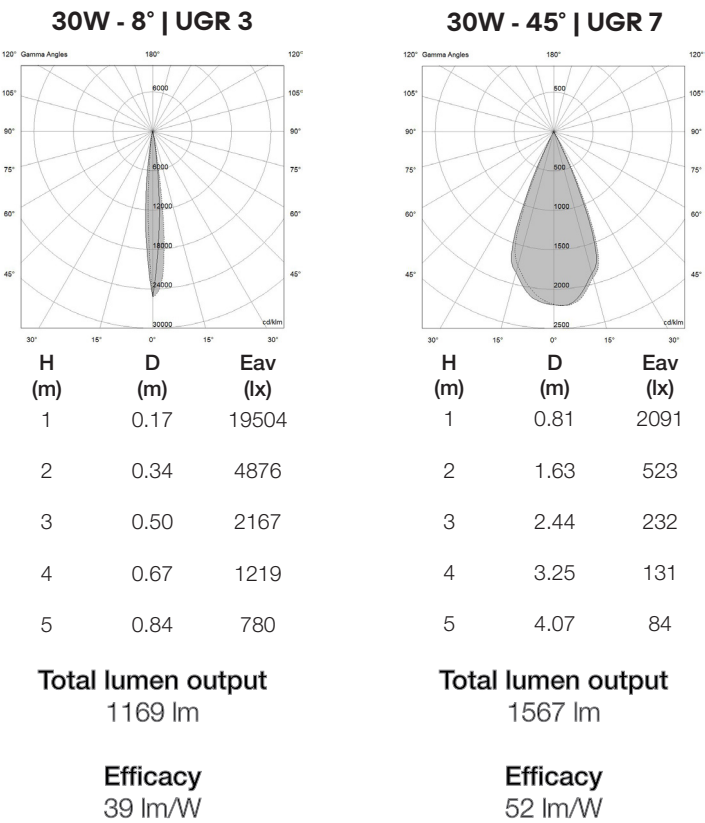

Aurora Zoom 3000

INSTALLATION ACCESSORIES

Compatible with **230Vac Track**:

Surface and suspended track (A01668._0)
1m

