
Circo 3

Indoor | Small downlights | IP40 | Class III | Dimmable



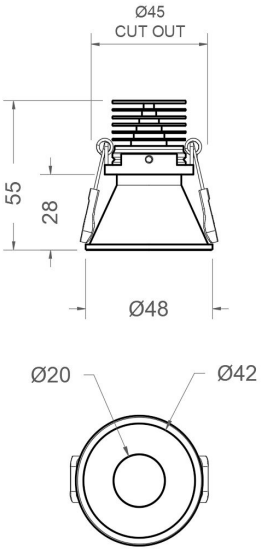

LIGHT SOURCE & OPTIC

Power
3W

Lens
15°
30°
60°
elliptical lens

Beam Direction
Fixed, Symmetrical/Asymmetrical

Material
PMMA

LED quantity
3

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime (Ta 25°)
L_{90} >60.000 hrs

Source Flux (3000K CRI>90)
357 lm

FIXTURE

Dimensions
Ø 48mm x H 55mm

Material
Aluminium

Body finishes
White (RAL 9003)

Weight
65gr

Mounting
Recessed: cut out Ø 45mm

Fixing
Springs

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 3x3V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126

Circo 3

PHOTOMETRIC DATA (3000K CRI>80)

3W - 15° | UGR 18




H (m)	D (m)	Eav (lx)
1	0.47	733
2	0.95	183
3	1.42	81
4	1.89	46
5	2.37	29

Total lumen output
338 lm

Efficacy
115 lm/W

3W - 30° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.55	410
2	1.11	102
3	1.66	46
4	2.21	26
5	2.76	16

Total lumen output
319 lm

Efficacy
89 lm/W

3W - 60° | UGR 23




H (m)	D (m)	Eav (lx)
1	0.88	189
2	1.75	47
3	2.63	21
4	3.51	12
5	4.39	8

Total lumen output
288 lm

Efficacy
77 lm/W

3W - 25°x45° | UGR 24



H (m)	D (m)	Eav (lx)
1	0.82-0.49	440
2	1.64-0.98	110
3	2.46-1.48	49
4	3.28-1.97	27
5	4.10-2.46	18

Total lumen output
334 lm


Efficacy
113 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126


Circo 3

SUGGESTED REMOTE DRIVERS

On/Off :
CC20-F-350-N



Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC25-DM-350-N



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126