

LIGHT SOURCE

LED quantity	1
Power max	11 W - 21 W - 30W - 40W
Total lumen output (3000K)	11W: 10° - 520 lm 25° - 513 lm 40° - 430 lm 60° - 438 lm EII - 516 lm
Efficacy lm/W (3000K)	11W: 10° - 47 lm/W 25° - 46 lm/W 40° - 39 lm/W 60° - 39 lm/W EII - 47 lm/W
CRI	>80 - >90
LED Temperature	2200K CRI>90 - 2700K- 3000K- 3000K CRI>90 - 4000K CRI
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10° - 25° - 40° - 60° - Elliptical lens
Beam direction	Fixed
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum
Available body finishes	Hard coat anodized: 4 - Black
Recessed box finishes	Integral: 6 - Stainless steel AISI 316L
IP Rate	IP67
IK Rate	IK10
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES


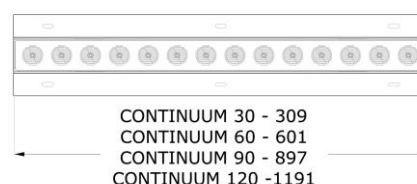
Driver	Built-in driver
Dimmable	No / DALI 2
Connection	In parallel at 220-240Vac
Class	II

MECHANICAL FEATURES






Dimensions	51 x 100 x 303-601-897-1191 mm (within box)
Weight	Tbd
Installation	Floor recessed
Cut-out	-
Use	Outdoor

ACCESSORIES

Filters	-
Visors	-
Box/ Frame	Recessed box
Installation tool	Suckers



PHOTOMETRIC DATA

Elliptical lens 8°x25° – 11W 							
H(m) D(m) Emax(lx) Eav(lx) E11 <u>1.00</u> 0.15 2619 1869 <u>2.00</u> 0.30 655 467 <u>3.00</u> 0.44 291 208 <u>4.00</u> 0.59 164 117 <u>5.00</u> 0.74 105 75							
10° Lens – 11W 	25° Lens – 11W 	40° Lens – 11W 	60° Lens – 11W 				
H(m) D(m) Emax(lx) Eav(lx) 10° <u>1.00</u> 0.28 5806 3694 <u>2.00</u> 0.56 1451 924 <u>3.00</u> 0.85 645 410 <u>4.00</u> 1.13 363 231 <u>5.00</u> 1.41 232 148	H(m) D(m) Emax(lx) Eav(lx) 25° <u>1.00</u> 0.54 2199 1349 <u>2.00</u> 1.08 550 337 <u>3.00</u> 1.62 244 150 <u>4.00</u> 2.16 137 84 <u>5.00</u> 2.70 88 54	H(m) D(m) Emax(lx) Eav(lx) 40° <u>1.00</u> 0.66 1053 638 <u>2.00</u> 1.32 263 160 <u>3.00</u> 1.99 117 71 <u>4.00</u> 2.65 66 40 <u>5.00</u> 3.31 42 26	H(m) D(m) Emax(lx) Eav(lx) 60° <u>1.00</u> 1.38 486 260 <u>2.00</u> 2.76 121 65 <u>3.00</u> 4.14 54 29 <u>4.00</u> 5.52 30 16 <u>5.00</u> 6.90 19 10				

NOTES

Recessed box is necessary for installing the fixture correctly: *Please specify always 1 box for each Continuum i IP67 in the purchase order.*

Equipped with 100 cm neoprene cable. Additional cable length available upon request.