


Continuum

Linear with Lenses | IP40 | Class III | Dimmable

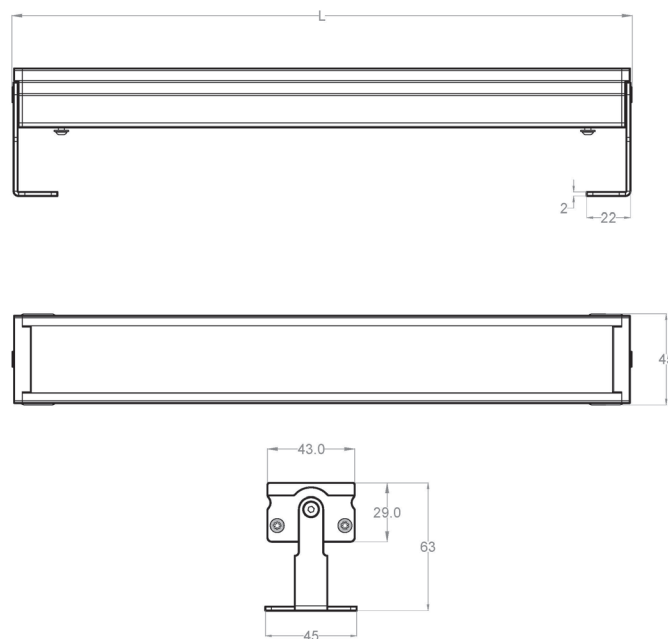

LIGHT SOURCE & OPTIC

Power

9W - 30cm	45W - 150cm
18W - 60cm	54W - 180cm
27W - 90 cm	63W - 210cm
36W - 120cm	

Lens

10°/25°/40°/60°/ Elliptical Lens

Beam Direction

Adjustable: tilting +/- 90°,
Symmetrical / Asymmetrical

Material

PMM + glass

LED quantity

23 LED/m

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>90/80
4000K CRI>80
TW 2700K-5000K - L max 180 cm

Lifetime (25°C)

L80 >60.000 hrs

Output (3000K CRI>90)

L 30cm: 841 lm

FIXTURE

Dimensions

43 mm x 29 mm x L
L: 30-60-90-120-150-180-210 cm

Material

Aluminium

Body finishes

Black

Weight

370 g - 30cm	1860 g - 150cm
750 g - 60cm	2240 g - 180cm
1120 g - 90cm	2690 g - 210cm
1490 g - 120cm	

Mounting

On surface

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Continuum

PHOTOMETRIC DATA (3000K CRI>80 - Length 30cm)

9W - 10° | UGR 12




H (m)	D (m)	Eav (lx)
1	0.20	5306
2	0.41	1326
3	0.61	590
4	0.82	332
5	1.02	212

Total lumen output
762 lm

Efficacy
84 lm/W

9W - 25° | UGR 11




H (m)	D (m)	Eav (lx)
1	0.50	2081
2	1.01	520
3	1.51	231
4	2.02	130
5	2.52	83

Total lumen output
762 lm

Efficacy
84 lm/W

9W - 40° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.57	1271
2	1.14	318
3	1.71	141
4	2.28	79
5	2.85	51

Total lumen output
737 lm

Efficacy
81 lm/W

9W - 60° | UGR 18




H (m)	D (m)	Eav (lx)
1	1.90	177
2	3.80	44
3	5.69	20
4	7.59	11
5	9.49	7

Total lumen output
585 lm

Efficacy
65 lm/W

9W - 10°x50° | UGR 14



H (m)	D (m)	Eav (lx)
1	0.19 - 0.88	2377
2	0.37 - 1.75	594
3	0.56 - 2.63	264
4	0.74 - 3.51	149
5	0.93 - 4.39	95


Total lumen output
753 lm

Efficacy
83 lm/W

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N




Dimmable (DALI 2, 0/1...10V, PUSH):

CC25-DM-24-NI



TW (DALI 2, DMX, RIPPLE FREE):

CV100-L-24-NL



Other options upon request