


# Discovery

Step Lights | IP67 | Class III | Dimmable

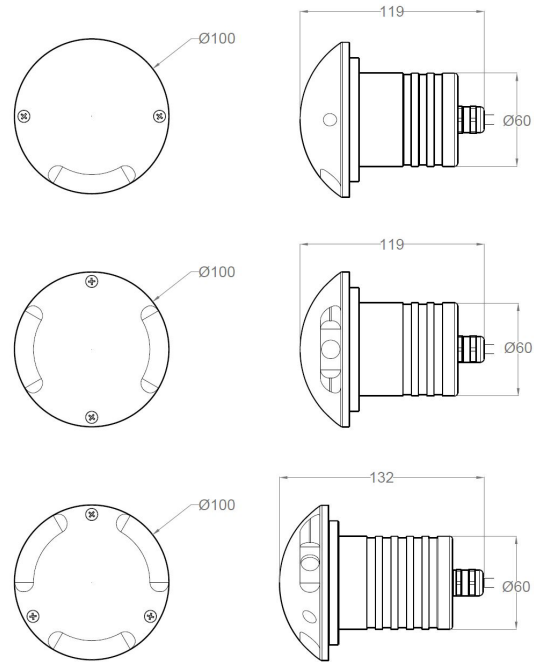

## LIGHT SOURCE & OPTIC

### Power

4Wx1  
4Wx2  
4Wx3

### Optics

Single light emission - trasparente glass  
- frosted glass  
Double light emission - trasparente glass  
- frosted glass  
Triple light emission - trasparente glass  
- frosted glass

### Beam Direction

Fixed

### Material

Glass

### LED quantity

1

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>80  
3000K CRI>80  
4000K CRI>80

### Lifetime

(L90) >55.000 hrs

## FIXTURE

### Dimensions

Ø 100mm x H 132mm max

### Material

Aluminium

### Body finishes

Black  
Gray  
Stainless Steel AISI316L

### Weight

600/1130gr

### Mounting

Semi-recessed

### Fixing

Floor Recessed via  
Plastic recessed box

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:  
350 mA  
Typical Vf= 9V  
Constant tension:  
24Vdc

### Driver requirement

Remote (not included)


### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

### Feature

Water Infiltration Protection System


PHOTOMETRIC DATA (3000K CRI>80)

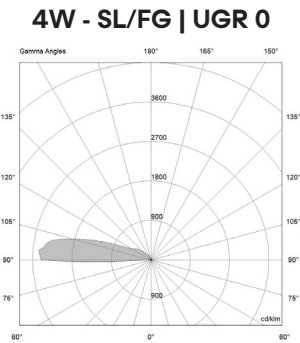

Total lumen output  
74 lm

Efficacy  
19 lm/W

BUG rating  
B0 U2 G0




Total lumen output  
92 lm

Efficacy  
23 lm/W


BUG rating  
B0 U3 G0

INSTALLATION ACCESSORIES

Plastic recessed box (A00468.40)




Watertight connector (A00387.40)




SUGGESTED REMOTE DRIVER

**On/off:**

CC14-F-350-PI





CV30-F-24-PI




**Multifunction (DALI 2, 0/1-10V, PUSH):**

CC20-D-350-P



**Dimmable (DALI 2):**

CV25-D-24-PI



Other options upon request