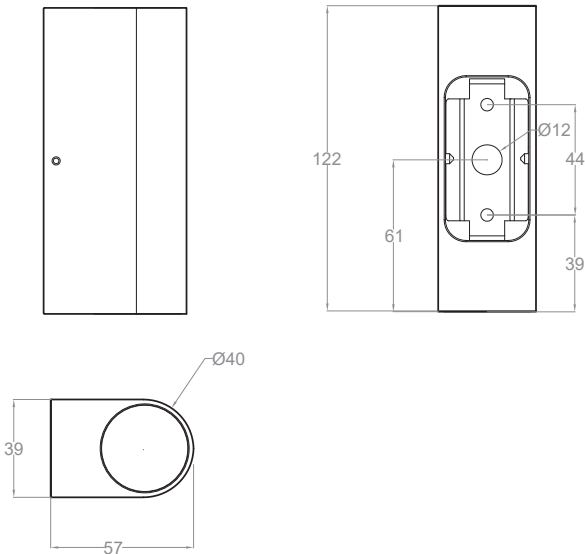


Eco IP67 double light emission

Surface Lighting | IP67 | Class II / III | Dimmable



LIGHT SOURCE & OPTIC

Power

1W x 2
2W x 2

Lens

10°
30°
40°

Beam Direction

Fixed

Material

PMMA + glass

LED quantity

2

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80
4000K CRI>80

Lifetime (Ta 25°)

L90 >55.000 hrs

Output (3000K CRI>90)

120 lm x 2 - 350mA
162 lm x 2 - 500mA

FIXTURE

Dimensions

D 57 mm x L 39mm x H 122mm

Material

Aluminium
Brass

Body finishes

Black
Titanium
Massive Brass
Grey

Weight

423gr (aluminum)

Mounting

Wall Mounting

Fixing

Screws

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA (1W)
500 mA (2W)
Typical Vf= 3V

Constant tension:
24Vdc

Main Voltage:
220-240Vac

Driver requirement







Remote (not included)
Built-in (220-240Vac)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Eco IP67 double light emission

PHOTOMETRIC DATA (single source -3000K CRI>80)

1W - 10° UGR 12			1W - 30° UGR 13			1W - 40° UGR 18		
								
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.32	351	1	0.46	333	1	0.84	107
2	0.65	88	2	0.91	83	2	1.08	27
3	0.97	39	3	1.37	37	3	2.52	12
4	1.29	22	4	1.83	21	4	3.35	7
5	1.61	14	5	2.28	13	5	4.19	4
Total lumen output 100 lm			Total lumen output 118 lm			Total lumen output 107 lm		
Efficacy 100 lm/W			Efficacy 118 lm/W			Efficacy 107 lm/W		
2W - 10° UGR 13			2W - 30° UGR 14			2W - 40° UGR 19		
								
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.32	485	1	0.46	453	1	0.84	142
2	0.65	121	2	0.91	113	2	1.68	36
3	0.97	54	3	1.37	50	3	2.52	16
4	1.29	30	4	1.83	28	4	3.35	9
5	1.61	19	5	2.29	18	5	4.19	6
Total lumen output 138 lm			Total lumen output 159 lm			Total lumen output 143 lm		
Efficacy 69 lm/W			Efficacy 80 lm/W			Efficacy 71 lm/W		

Eco IP67 double light emission

SUGGESTED REMOTE DRIVERS


On/Off :
CC14-F-350/500-PI




CV30-F-24-PI



Multifunction (DALI 2):
CC10-D-350/500-PI



CV25-D-24-PI



Other options upon request
