

LIGHT SOURCE

LED quantity	1		
Power max	1 W – 2 W – 3 W		
Total lumen output (3000K)	1W: 10° - 120 lm 30° - 107 lm 40° - 121 lm Ell. lens - 112 lm Trans.glass - 46 lm Frost.glass - 22 lm	2W: 10° - 162 lm 30° - 146 lm 40° - 165 lm Ell. lens - 153 lm Trans.glass - 62 lm Frost.glass - 32 lm	3W: Trans.glass-102 lm Frost.glass - 87 lm
Efficacy lm/W (3000K)	1W: 10° - 120 lm/W 30° - 107 lm/W 40° - 121 lm/W Ell. lens - 112 lm/W Trans.glass - 46 lm/W Frost.glass - 22 lm/W	2W: 10° - 81 lm/W 30° - 73 lm/W 40° - 82 lm/W Ell. lens - 76 lm/W Trans.glass - 31 lm/W Frost.glass - 16 lm/W	3W: Trans.glass - 51 lm/W Frost.glass - 43 lm/W
CRI	>80		
LED Temperature	2200K – 2700K – 3000K – 4000K		
Average operational life	50.000 hours		

OPTIC

Material	PMMA
Available optics	10° - 30° - 40° - elliptical lens – transparent glass - frosted glass
Beam direction	Fixed
Flux symmetry	Symmetrical, asymmetrical

FIXTURE



Material	Stainless Steel
Available finishes	As per material: 6 - Stainless steel AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

ELECTRICAL FEATURES


Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA – 500mA
Class	III

MECHANICAL FEATURES

Dimensions	Ø35 x 67 mm
Weight	200 gr
Installation	Wall, ceiling, floor recessed
Cut-out	Ø40 mm (recessed box A00231.30)
Use	Outdoor



A00231.30 Recessed box








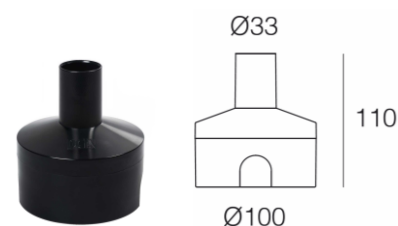


A00249.40 Recessed box

ACCESSORIES

Visors	-
Filters	-
Box/ Frame	Recessed box
Fixing system	-

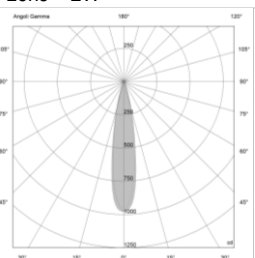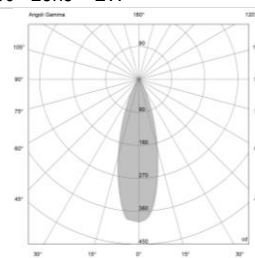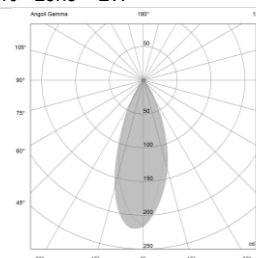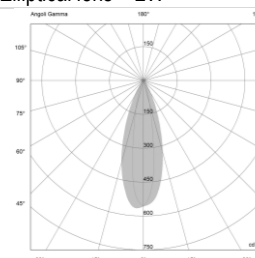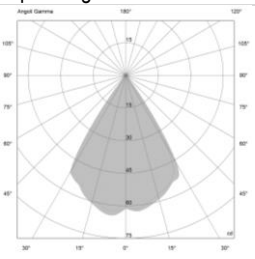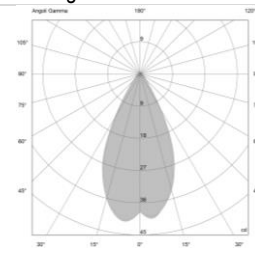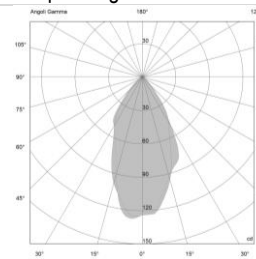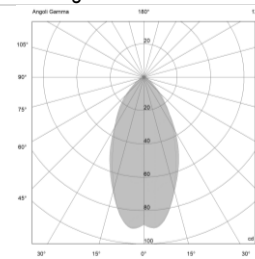PHOTOMETRIC DATA

10° Lens – 2W	30° Lens – 2W	40° Lens – 2W	Elliptical lens – 2W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>10°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.34</td><td>981</td><td>635</td></tr> <tr> <td><u>2.00</u></td><td>0.67</td><td>245</td><td>159</td></tr> <tr> <td><u>3.00</u></td><td>1.01</td><td>109</td><td>71</td></tr> <tr> <td><u>4.00</u></td><td>1.35</td><td>61</td><td>40</td></tr> <tr> <td><u>5.00</u></td><td>1.69</td><td>39</td><td>25</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.34	981	635	<u>2.00</u>	0.67	245	159	<u>3.00</u>	1.01	109	71	<u>4.00</u>	1.35	61	40	<u>5.00</u>	1.69	39	25	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>30°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.56</td><td>389</td><td>240</td></tr> <tr> <td><u>2.00</u></td><td>1.12</td><td>97</td><td>60</td></tr> <tr> <td><u>3.00</u></td><td>1.68</td><td>43</td><td>27</td></tr> <tr> <td><u>4.00</u></td><td>2.24</td><td>24</td><td>15</td></tr> <tr> <td><u>5.00</u></td><td>2.80</td><td>16</td><td>10</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.56	389	240	<u>2.00</u>	1.12	97	60	<u>3.00</u>	1.68	43	27	<u>4.00</u>	2.24	24	15	<u>5.00</u>	2.80	16	10	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>40°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.81</td><td>280</td><td>167</td></tr> <tr> <td><u>2.00</u></td><td>1.61</td><td>70</td><td>42</td></tr> <tr> <td><u>3.00</u></td><td>2.42</td><td>31</td><td>19</td></tr> <tr> <td><u>4.00</u></td><td>3.23</td><td>17</td><td>10</td></tr> <tr> <td><u>5.00</u></td><td>4.04</td><td>11</td><td>7</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	40°				<u>1.00</u>	0.81	280	167	<u>2.00</u>	1.61	70	42	<u>3.00</u>	2.42	31	19	<u>4.00</u>	3.23	17	10	<u>5.00</u>	4.04	11	7	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>20°x40°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.33</td><td>564</td><td>354</td></tr> <tr> <td><u>2.00</u></td><td>0.66</td><td>141</td><td>88</td></tr> <tr> <td><u>3.00</u></td><td>0.99</td><td>63</td><td>39</td></tr> <tr> <td><u>4.00</u></td><td>1.31</td><td>35</td><td>22</td></tr> <tr> <td><u>5.00</u></td><td>1.64</td><td>23</td><td>14</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	20°x40°				<u>1.00</u>	0.33	564	354	<u>2.00</u>	0.66	141	88	<u>3.00</u>	0.99	63	39	<u>4.00</u>	1.31	35	22	<u>5.00</u>	1.64	23	14
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
10°																																																																																																																			
<u>1.00</u>	0.34	981	635																																																																																																																
<u>2.00</u>	0.67	245	159																																																																																																																
<u>3.00</u>	1.01	109	71																																																																																																																
<u>4.00</u>	1.35	61	40																																																																																																																
<u>5.00</u>	1.69	39	25																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.56	389	240																																																																																																																
<u>2.00</u>	1.12	97	60																																																																																																																
<u>3.00</u>	1.68	43	27																																																																																																																
<u>4.00</u>	2.24	24	15																																																																																																																
<u>5.00</u>	2.80	16	10																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
40°																																																																																																																			
<u>1.00</u>	0.81	280	167																																																																																																																
<u>2.00</u>	1.61	70	42																																																																																																																
<u>3.00</u>	2.42	31	19																																																																																																																
<u>4.00</u>	3.23	17	10																																																																																																																
<u>5.00</u>	4.04	11	7																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
20°x40°																																																																																																																			
<u>1.00</u>	0.33	564	354																																																																																																																
<u>2.00</u>	0.66	141	88																																																																																																																
<u>3.00</u>	0.99	63	39																																																																																																																
<u>4.00</u>	1.31	35	22																																																																																																																
<u>5.00</u>	1.64	23	14																																																																																																																
UGR = 17	UGR = 20	UGR = 22	UGR = 17/22																																																																																																																
Transparent glass – 2W	Frosted glass – 2W	Transparent glass – 3W	Frosted glass – 3W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Trans. glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>1.27</td><td>64</td><td>34</td></tr> <tr> <td><u>2.00</u></td><td>2.55</td><td>16</td><td>8</td></tr> <tr> <td><u>3.00</u></td><td>3.82</td><td>7</td><td>4</td></tr> <tr> <td><u>4.00</u></td><td>5.09</td><td>4</td><td>2</td></tr> <tr> <td><u>5.00</u></td><td>6.36</td><td>3</td><td>1</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Trans. glass				<u>1.00</u>	1.27	64	34	<u>2.00</u>	2.55	16	8	<u>3.00</u>	3.82	7	4	<u>4.00</u>	5.09	4	2	<u>5.00</u>	6.36	3	1	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Frosted glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.94</td><td>41</td><td>23</td></tr> <tr> <td><u>2.00</u></td><td>1.88</td><td>10</td><td>6</td></tr> <tr> <td><u>3.00</u></td><td>2.83</td><td>5</td><td>3</td></tr> <tr> <td><u>4.00</u></td><td>3.77</td><td>3</td><td>1</td></tr> <tr> <td><u>5.00</u></td><td>4.71</td><td>2</td><td>1</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Frosted glass				<u>1.00</u>	0.94	41	23	<u>2.00</u>	1.88	10	6	<u>3.00</u>	2.83	5	3	<u>4.00</u>	3.77	3	1	<u>5.00</u>	4.71	2	1	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Trans. glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.89</td><td>127</td><td>68</td></tr> <tr> <td><u>2.00</u></td><td>1.77</td><td>32</td><td>17</td></tr> <tr> <td><u>3.00</u></td><td>2.66</td><td>14</td><td>8</td></tr> <tr> <td><u>4.00</u></td><td>3.55</td><td>8</td><td>4</td></tr> <tr> <td><u>5.00</u></td><td>4.43</td><td>5</td><td>3</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Trans. glass				<u>1.00</u>	0.89	127	68	<u>2.00</u>	1.77	32	17	<u>3.00</u>	2.66	14	8	<u>4.00</u>	3.55	8	4	<u>5.00</u>	4.43	5	3	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>Frosted glass</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.94</td><td>91</td><td>50</td></tr> <tr> <td><u>2.00</u></td><td>1.88</td><td>23</td><td>12</td></tr> <tr> <td><u>3.00</u></td><td>2.82</td><td>10</td><td>6</td></tr> <tr> <td><u>4.00</u></td><td>3.76</td><td>6</td><td>3</td></tr> <tr> <td><u>5.00</u></td><td>4.69</td><td>4</td><td>2</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	Frosted glass				<u>1.00</u>	0.94	91	50	<u>2.00</u>	1.88	23	12	<u>3.00</u>	2.82	10	6	<u>4.00</u>	3.76	6	3	<u>5.00</u>	4.69	4	2
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Trans. glass																																																																																																																			
<u>1.00</u>	1.27	64	34																																																																																																																
<u>2.00</u>	2.55	16	8																																																																																																																
<u>3.00</u>	3.82	7	4																																																																																																																
<u>4.00</u>	5.09	4	2																																																																																																																
<u>5.00</u>	6.36	3	1																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Frosted glass																																																																																																																			
<u>1.00</u>	0.94	41	23																																																																																																																
<u>2.00</u>	1.88	10	6																																																																																																																
<u>3.00</u>	2.83	5	3																																																																																																																
<u>4.00</u>	3.77	3	1																																																																																																																
<u>5.00</u>	4.71	2	1																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Trans. glass																																																																																																																			
<u>1.00</u>	0.89	127	68																																																																																																																
<u>2.00</u>	1.77	32	17																																																																																																																
<u>3.00</u>	2.66	14	8																																																																																																																
<u>4.00</u>	3.55	8	4																																																																																																																
<u>5.00</u>	4.43	5	3																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
Frosted glass																																																																																																																			
<u>1.00</u>	0.94	91	50																																																																																																																
<u>2.00</u>	1.88	23	12																																																																																																																
<u>3.00</u>	2.82	10	6																																																																																																																
<u>4.00</u>	3.76	6	3																																																																																																																
<u>5.00</u>	4.69	4	2																																																																																																																
UGR = 22	UGR = 21	UGR = 24	UGR = 26																																																																																																																

NOTES

Provided with 100 cm neoprene cable.