


# Luna B Multi

Pendant Lighting | IP40 | Class III | Dimmable

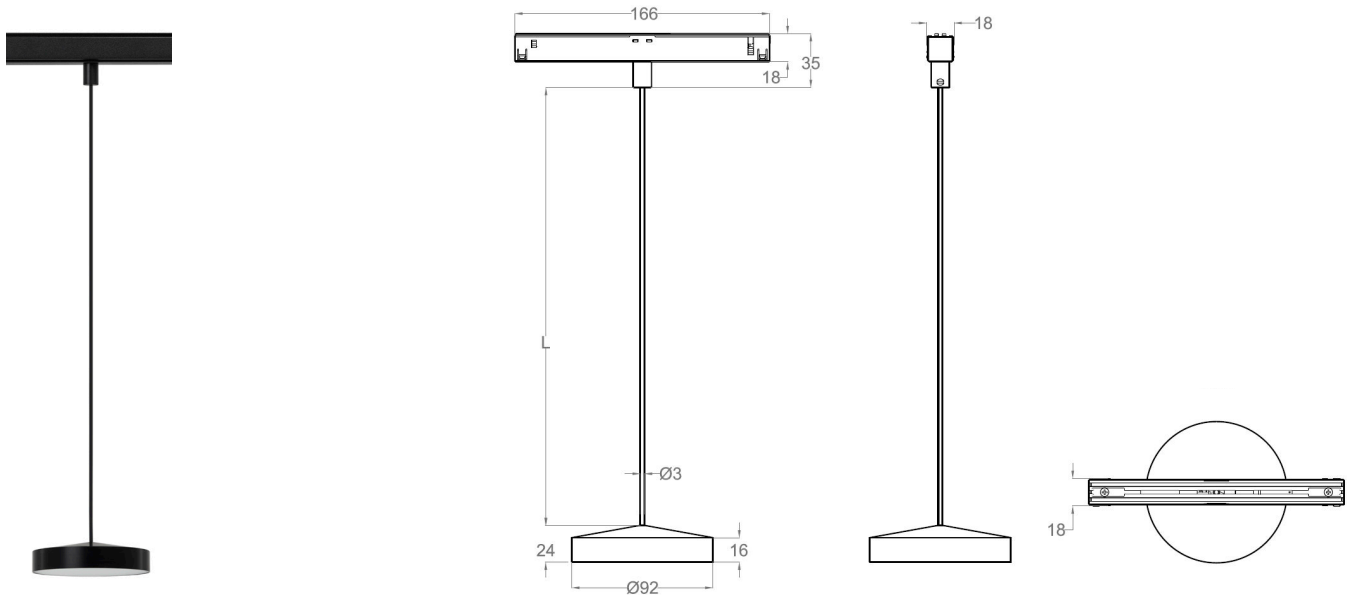

## LIGHT SOURCE & OPTIC

### Power

6W

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

Glass

### LED quantity

56

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

### Lifetime (Ta 25°)

L70 >54.000 hrs

### Output (3000K CRI>90)

584 lm

## FIXTURE

### Dimensions

Ø 92mm x H 24mm

### Material

Brass

Aluminium

### Body finishes

PVD Satin Black

PVD Polished Black

PVD Gold Chrome

PVD Satin Gold

PVD Rose gold

PVD Shiny Chrome

Titanium

Dark bronze

Champagne gold

### Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

### Weight

350gr

### Mounting

On Micro track

### Fixing

Adapter

## ELECTRICAL FEATURES

### Power Supply

Constant tension: 24 Vdc

### Driver requirement

Remote (not included)

### Control


On/off

Broadcast

DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 26

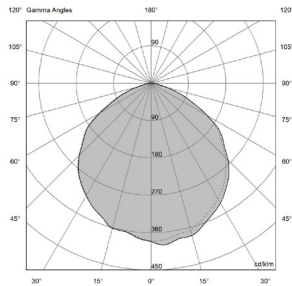

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1

Total lumen output  
363 lm

Efficacy  
60 lm/W

# Luna B Multi

## INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Multisystem  
Track:  
Standard track (A00918.\_0)



Trimless track (A01064.\_0)




Suspended track (A01664.\_0)




## SUGGESTED REMOTE DRIVERS

**On/Off :**  
CC70-F-24-N



For On/Off and DALI version.  
Please consider 1 address for each DALI  
projector.

**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CV75-DM-24-NI



For Broadcast version.  
Please consider 1 address for each driver in  
case of DALI control.

Other options upon request