

LIGHT SOURCE

LED quantity	1		
Power max	3 W – 6 W – 9 W		
Total lumen output (3000K)	3W: 3° - 131 lm	6W: 10° - 312 lm 30° - 274 lm 50° - 224 lm	9W: 10° - 388 lm 30° - 343 lm 50° - 278 lm
Efficacy lm/W (3000K)	3W: 3° - 44 lm/W	6W: 10° - 52 lm/W 30° - 46 lm/W 50° - 37 lm/W	9W: 10° - 43 lm/W 30° - 38 lm/W 50° - 31 lm/W
CRI	>80 – >90		
LED Temperature	2700K – 3000K – 3000K CRI>90 – 3500K - 4000K		
Average operational life	50.000 hours		

OPTIC

Material	PMMA
Available optics	3° - 10° - 30° - 50°
Beam direction	Adjustable +/-100°, rotating +/- 355°
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum, Stainless Steel
Available finishes	Hard coat anodized: 3 - Gray 4 - Black T - Titanium As per material: 6 - Stainless steel AISI 316L
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique, stake, tree strap mounting

ELECTRICAL FEATURES

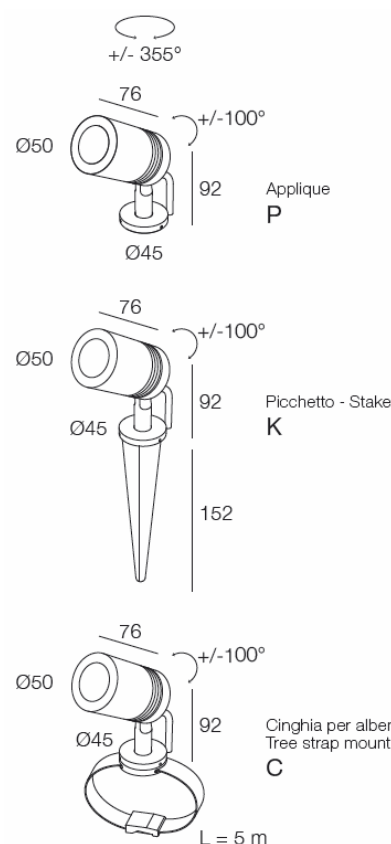
Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 500mA – 700mA – 900mA
Class	III

MECHANICAL FEATURES

Dimensions (body)	Ø50 x 76 mm
Weight	380 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor

ACCESSORIES

Visors	Low glare visor, low glare snoot
Filters	-
Box/ Frame	-
Fixing system	-







A00519._0 Low glare visor



A00848._0 Low glare snoot

PHOTOMETRIC DATA

3° Lens – 3W	10° Lens – 9W	30° Lens – 9W	50° Lens – 9W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>3°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.08</td><td>6854</td><td>4072</td></tr> <tr> <td><u>2.00</u></td><td>0.16</td><td>1714</td><td>1018</td></tr> <tr> <td><u>3.00</u></td><td>0.23</td><td>762</td><td>452</td></tr> <tr> <td><u>4.00</u></td><td>0.31</td><td>428</td><td>255</td></tr> <tr> <td><u>5.00</u></td><td>0.39</td><td>274</td><td>163</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	3°				<u>1.00</u>	0.08	6854	4072	<u>2.00</u>	0.16	1714	1018	<u>3.00</u>	0.23	762	452	<u>4.00</u>	0.31	428	255	<u>5.00</u>	0.39	274	163	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>10°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.21</td><td>6211</td><td>3843</td></tr> <tr> <td><u>2.00</u></td><td>0.43</td><td>1553</td><td>961</td></tr> <tr> <td><u>3.00</u></td><td>0.64</td><td>690</td><td>427</td></tr> <tr> <td><u>4.00</u></td><td>0.86</td><td>388</td><td>240</td></tr> <tr> <td><u>5.00</u></td><td>1.07</td><td>248</td><td>154</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.21	6211	3843	<u>2.00</u>	0.43	1553	961	<u>3.00</u>	0.64	690	427	<u>4.00</u>	0.86	388	240	<u>5.00</u>	1.07	248	154	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>30°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.41</td><td>1877</td><td>1170</td></tr> <tr> <td><u>2.00</u></td><td>0.82</td><td>469</td><td>293</td></tr> <tr> <td><u>3.00</u></td><td>1.23</td><td>209</td><td>130</td></tr> <tr> <td><u>4.00</u></td><td>1.64</td><td>117</td><td>73</td></tr> <tr> <td><u>5.00</u></td><td>2.05</td><td>75</td><td>47</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.41	1877	1170	<u>2.00</u>	0.82	469	293	<u>3.00</u>	1.23	209	130	<u>4.00</u>	1.64	117	73	<u>5.00</u>	2.05	75	47	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>50°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.56</td><td>955</td><td>579</td></tr> <tr> <td><u>2.00</u></td><td>1.13</td><td>239</td><td>145</td></tr> <tr> <td><u>3.00</u></td><td>1.69</td><td>106</td><td>64</td></tr> <tr> <td><u>4.00</u></td><td>2.26</td><td>60</td><td>36</td></tr> <tr> <td><u>5.00</u></td><td>2.82</td><td>38</td><td>23</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	50°				<u>1.00</u>	0.56	955	579	<u>2.00</u>	1.13	239	145	<u>3.00</u>	1.69	106	64	<u>4.00</u>	2.26	60	36	<u>5.00</u>	2.82	38	23
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
3°																																																																																																																			
<u>1.00</u>	0.08	6854	4072																																																																																																																
<u>2.00</u>	0.16	1714	1018																																																																																																																
<u>3.00</u>	0.23	762	452																																																																																																																
<u>4.00</u>	0.31	428	255																																																																																																																
<u>5.00</u>	0.39	274	163																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
10°																																																																																																																			
<u>1.00</u>	0.21	6211	3843																																																																																																																
<u>2.00</u>	0.43	1553	961																																																																																																																
<u>3.00</u>	0.64	690	427																																																																																																																
<u>4.00</u>	0.86	388	240																																																																																																																
<u>5.00</u>	1.07	248	154																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.41	1877	1170																																																																																																																
<u>2.00</u>	0.82	469	293																																																																																																																
<u>3.00</u>	1.23	209	130																																																																																																																
<u>4.00</u>	1.64	117	73																																																																																																																
<u>5.00</u>	2.05	75	47																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
50°																																																																																																																			
<u>1.00</u>	0.56	955	579																																																																																																																
<u>2.00</u>	1.13	239	145																																																																																																																
<u>3.00</u>	1.69	106	64																																																																																																																
<u>4.00</u>	2.26	60	36																																																																																																																
<u>5.00</u>	2.82	38	23																																																																																																																

NOTES

Provided with 200 cm neoprene