


# Maestro IP67

Projectors | IP67 | Class III | Dimmable

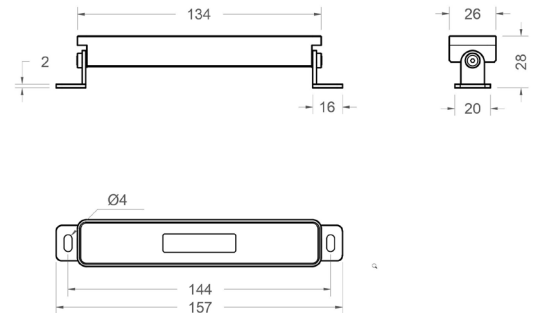

## LIGHT SOURCE & OPTIC

### Power

4W

### Emission

10°  
30°  
40°  
60°  
Elliptical lens

### Beam Direction

Adjustable:  
Tilting +/-90°  
Symmetrical/Asymmetrical

### Material

Methacrylate

### LED quantity

4

### Binning

2 MacAdam Steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>80  
3000K CRI>80/90  
4000K CRI>80

### Lifetime

(L85) >55.300 hrs

## FIXTURE

### Dimensions

L 134mm x S 26mm x H 28mm

### Material

Aluminium

### Body finishes

Black  
Gray

### Weight

150gr

### Mounting

On surface

### Fixing

Screws

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant tension: 24 Vdc

### Driver requirement

Remote (not included)

### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI


### Feature

Water Infiltration Protection System

# Maestro IP67

## PHOTOMETRIC DATA (3000K CRI>80)

### 4W - 10° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.26	1663
2	0.52	416
3	0.77	185
4	1.03	104
5	1.29	67

**Total lumen output**  
324 lm

**Efficacy**  
81 lm/W

### 4W - 30° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.41	775
2	0.82	194
3	1.22	86
4	1.63	48
5	2.04	31

**Total lumen output**  
319 lm

**Efficacy**  
80 lm/W

### 4W - 40° | UGR 22




H (m)	D (m)	Eav (lx)
1	0.65	380
2	1.31	95
3	1.96	42
4	2.61	24
5	3.26	15

**Total lumen output**  
313 lm

**Efficacy**  
78 lm/W

### 4W - 60° | UGR 24




H (m)	D (m)	Eav (lx)
1	1.04	195
2	2.08	49
3	3.12	22
4	4.16	12
5	5.20	8

**Total lumen output**  
302 lm

**Efficacy**  
75 lm/W

### 4W - E.L. | UGR 21




H (m)	D (m)	Eav (lx)
1	0.77-0.30	661
2	1.54-0.59	165
3	2.31-0.89	73
4	3.08-1.19	41
5	3.85-1.49	26

**Total lumen output**  
306 lm

**Efficacy**  
76 lm/W


## INSTALLATION ACCESSORIES

**Watertight connector** (A00357.40)




## SUGGESTED REMOTE DRIVERS

**On/Off :**  
CV30-F-24-PI



**Dali :**  
CV25-D-24-PI



Other options upon request