
Maestro

Indoor | Showcase lighting | IP40 | Class III | Dimmable



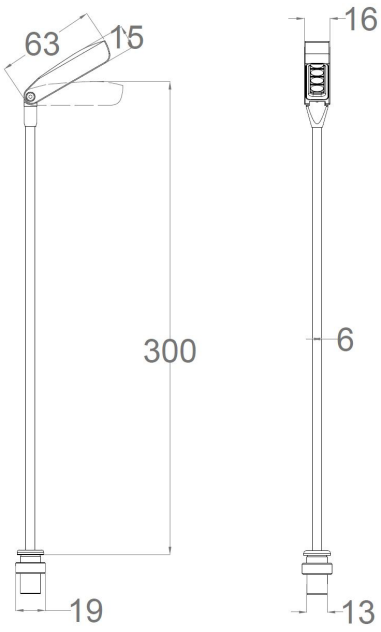

LIGHT SOURCE & OPTIC

Power
4W

Lens
10°/30°/40°/60°
Elliptical / Accent / Soft / Fade

Beam Direction
Adjustable:
Tilting +/- 125°, Rotating +/- 355°

Material
PMMA

LED quantity
4

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80/90
3000K CRI>80/90
4000K CRI>80/90
5000K CRI>80

Lifetime (Ta 25°)
L_{80} >76.600 hrs

Source Flux (3000K CRI>90)
400lm @ 350 mA

FIXTURE

Dimensions
63 x 16 x 15 mm (head)
H 300 mm (pole)

Material
Aluminium

Body finishes
Black
Titanium
Champagne Gold
Gray

Weight
50gr

Mounting
On telescopic pole: cut out Ø 13,5 mm

Fixing
Ring Nut

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 4x3V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026

Maestro

PHOTOMETRIC DATA (3000K CRI>80)

4W - 10° | UGR 12.7




H (m)	D (m)	Eav (lx)
1	0.27	2219
2	0.54	555
3	0.80	247
4	1.07	139
5	1.34	89

Total lumen output
406 lm

Efficacy
102 lm/W

4W - 30° | UGR 19.6




H (m)	D (m)	Eav (lx)
1	0.42	862
2	0.85	216
3	1.27	96
4	1.69	54
5	2.12	34

Total lumen output
373 lm

Efficacy
93 lm/W

4W - 40° | UGR 23




H (m)	D (m)	Eav (lx)
1	0.65	461
2	1.31	115
3	1.96	51
4	2.62	29
5	3.27	18

Total lumen output
382 lm

Efficacy
96 lm/W

4W - 60° | UGR 25




H (m)	D (m)	Eav (lx)
1	0.99	252
2	1.98	63
3	2.98	28
4	3.97	16
5	4.96	10

Total lumen output
367 lm

Efficacy
92 lm/W

4W - Elliptical | UGR 13.4




H (m)	D (m)	Eav (lx)
1	0.29-0.76	845
2	0.59-1.51	211
3	0.88-2.27	94
4	1.18-3.02	53
5	1.47-3.78	34

Total lumen output
378 lm

Efficacy
96 lm/W

4W - Accent | UGR 20.2




H (m)	D (m)	Eav (lx)
1	0.30	1296
2	0.60	324
3	0.90	144
4	1.20	81
5	1.50	52

Total lumen output
393 lm

Efficacy
98 lm/W

4W - Fade | UGR 21.1




H (m)	D (m)	Eav (lx)
1	0.33-0.76	710
2	0.66-1.52	178
3	0.99-2.28	79
4	1.32-3.05	44
5	1.65-3.81	28

Total lumen output
375 lm

Efficacy
94 lm/W

4W - Soft | UGR 23.3



H (m)	D (m)	Eav (lx)
1	0.51	559
2	1.03	140
3	1.54	62
4	2.05	35
5	2.57	22


Total lumen output
370 lm

Efficacy
93 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026


SUGGESTED REMOTE DRIVER

On/off:
CC20-F-350-N



Ø 55

Multifunction (DALI 2, 0/1-10V, PUSH):
CC25-DM-350-N



Ø 55

Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026