


Meteora flex

Linear System | IP65 | Class III | Dimmable

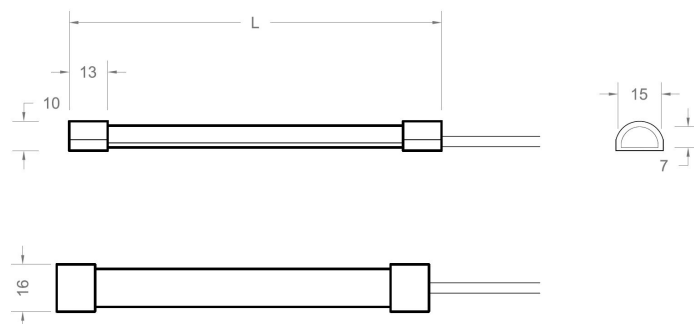

LIGHT SOURCE & OPTIC

Power
18W

Covers
Opal cover (25°)

Beam Direction
Fixed, Symmetrical

Material
Silicon

LED quantity
210

Cutting unit
33,3±2mm

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80/90
3000K CRI>80/90
4000K CRI>80/90

Lifetime
L80 >35.000 hrs

FIXTURE

Dimensions

D 15mm x H 10mm x L:
 005 009 012 015 019 022 025 029 032 035
 039 042 045 049 052 055 059 062 065 069
 072 075 079 082 085 089 092 095 099 102
 105 109 112 115 119 122 125 129 132 135
 139 142 145 149 152 155 159 162 165 168
 172 175 178 182 185 188 192 195 198 202
 205 208 212 215 218 222 225 228 232 235
 238 242 245 248 252 255 258 262 265 268
 272 275 278 282 285 288 292 295 298 302
 305 308 312 315 318 322 325 328 332 335
 338 342 345 348 352 355 358 362 365 368
 372 375 378 382 385 388 392 395 398 402
 405 408 412 415 418 422 425 428 432 435
 438 442 445 448 452 456 458 462 465 468
 472 475 478 482 485 488 492 495 498 501

Material
Silicon

Body finishes
Neutral

Weight
200gr/m

End caps
Silicon

Mounting
On surface

Fixing
Double sided tape

Bending direction
Top bending (Ø>80mm)

Working temperature
-25° / +60°

ELECTRICAL FEATURES

Power supply
Constant tension: 24 Vdc

Driver
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Cable exit
Cap exit




In&Out cap exit



Meteora flex

PHOTOMETRIC DATA (3000K CRI>90 - Opal cover)

18W/m - 135° | UGR 34

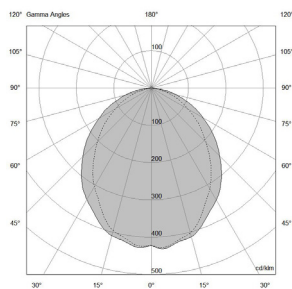

H (m)	D (m)	Eav (lx)
1	4.87	27
2	9.74	7
3	14.61	3
4	19.48	2
5	24.35	1

Total lumen output

1170 lm


Efficacy

65 lm/W

INSTALLATION ACCESSORIES

Mounting clips

Only for Cometa Q8 without fixing




Mounting clip
A00719.70

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N

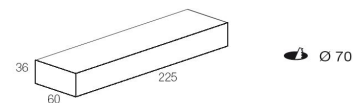

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI



Other options upon request