
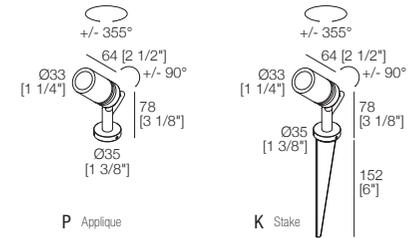



Projectors

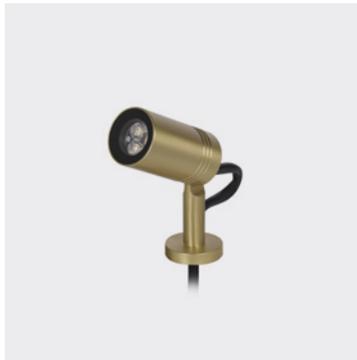

Micro In&Out cable

350mA Lumen Output 3000K	3W 350mA - 270 lm
15° Lens	7A4939._._.-UL
30° Lens	764939._._.-UL
60° Lens	754939._._.-UL
Frosted Glass	714939._._.-UL
Elliptical Lens	774939._._.-UL

24V Lumen Output 3000K	3W 24Vdc - 270 lm
15° Lens	7A4940._._.-UL
30° Lens	764940._._.-UL
60° Lens	754940._._.-UL
Frosted Glass	714940._._.-UL
Elliptical Lens	774940._._.-UL

Micro In&Out cable with hex louver

350mA Lumen Output 3000K	3W 350mA - 190 lm
15° Lens	7A4941._._.-UL
30° Lens	764941._._.-UL
60° Lens	754941._._.-UL
Frosted Glass	714941._._.-UL
Elliptical Lens	774941._._.-UL

24V Lumen Output 3000K	3W 24Vdc - 190 lm
15° Lens	7A4942._._.-UL
30° Lens	764942._._.-UL
60° Lens	754942._._.-UL
Frosted Glass	714942._._.-UL
Elliptical Lens	774942._._.-UL

FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● E Massive Brass	● Y 2700K	K Stake
● 3 Gray	● 6 3000K	
	● W 3000K CRI > 90	
	● 9 4000K	



SUGGESTED DRIVERS (not included)

350mA	CC36-R-350-NF	p. 244
24Vdc	CV60-R-24-M	p. 248

ACCESSORIES

 35 [1 3/8"] Ø39 [1 1/2"] 9 [3/8"] Low glare visor A00846._0	 35 [1 3/8"] Ø39 [1 1/2"] Low glare snoot A00847._0
---	---

EXAMPLE CODE COMPOSITION

