

## LIGHT SOURCE

LED quantity	1
Power max	6 W
Total lumen output (3000K)	63 lm
Efficacy lm/W (3000K)	11 lm/W
LOR (3000K)	-
CRI	>80
LED Temperature (K)	3000K
Average operational life	50.000 hours

## OPTIC

Material	PMMA
Available optics	45°
Beam direction	Fixed
Flux symmetry	Asymmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum, Tempered glass
Finish	Aluminum Hard Coat Anodizing (Black, Grey, Dark Bronze)
Available finishes	Black, Grey, Dark Bronze
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	Recessed box

## ELECTRICAL FEATURES



Driver	<b>DRIVERLESS</b> <i>Technology</i>
Dimmable	No
For emergency lighting	-
Connection	At 220-240 Vac
Class	I

## MECHANICAL FEATURES

Dimensions (mm):	Ø59 x 99
Weight	410 gr
Mounting	Wall
Cut-out (mm)	Ø55
Use	Outdoor

## NOTES

Louver included
-----------------

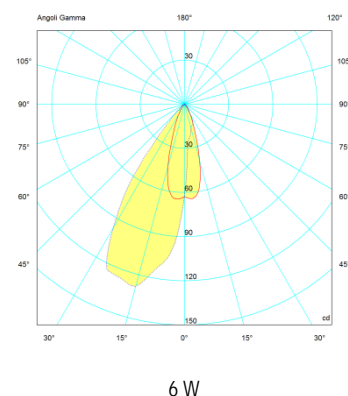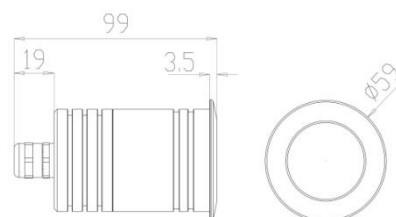

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
45°			
0.60	0.51	322	193
1.20	1.03	81	48
1.80	1.54	36	21
2.40	2.06	20	12
3.00	2.57	13	8